



CCT switchable between 3000K, 4000K & 5700K



Wattage Switchable



Suspended gear tray for easy installation

## BOREALIS VERSA

CCT Colour & Wattage Switchable Batten with plug-in Versabox accessories

### FEATURES

<b>IP rating</b>	IP20
<b>IK rating</b>	IK06
<b>CSP Switchable</b>	Switchable CCT
<b>Sensor Option</b>	Versabox, see accessories
<b>Dimmable Option</b>	Yes (DALI-2, 0-10V, PUSH-DIM)
<b>LED Lifetime</b>	L70 100,000h
<b>Colour Rendering Index</b>	CRI>80
<b>Colour Consistency</b>	SDCM6
<b>Emergency Option</b>	Yes, Manual, Self and DALI-2 Test

### INSTALLATION INFORMATION

<b>Input</b>	220-240V AC
<b>Maximum Ambient Temperature</b>	-20°C - 40°C
<b>Weight</b>	4ft: 1.47kg, 5ft: 1.83kg, 6ft: 2.14kg
<b>Inrush Current</b>	13.2A 0.28ms
<b>Construction Material</b>	Steel Housing, PC Opal Diffuser RAL9003
<b>SELV</b>	No
<b>Electric Class (1, 2, 3)</b>	I
<b>Install Connector Type</b>	Removeable, moveable, loop in/out
<b>UK Building Regulations</b>	Part L
<b>Mounting Options</b>	Ceiling, wall & suspended
<b>Power Factor</b>	0.9

### WARRANTY


Warranty	7 years
Battery Warranty	5 years
On-Site Warranty	2 years

### FEATURES & BENEFITS

- Versabox plug and play kit range to accommodate project requirements
- Multiple fixing points and several wiring options
- Ideal for sheds, garages and warehouses
- Diffuser is released by side buttons
- Self and Manual emergency option available
- DALI-2, 0-10V and DALI Emergency option available to order contact CWD

### Photometrics @ 25°C

Product Code	Finish	Type	Beam	W	Colour	lm	lm/W	EM lm	Energy	
BT4NEM	White	On-Off Manual Test Emergency	120°	18W	4000K	2775	154	240		
					5700K	2775	154	240		
					25W	3000K	3500	144		240
						4000K	3750	154		240
					31W	5700K	3750	154		240
						3000K	4340	144		240
				37W	4000K	4650	154	240		
					5700K	4650	154	240		
					3000K	5180	144	240		
						4000K	5550	154		240
					5700K	5550	154	240		
						BT5NEM	White	On-Off Manual Test Emergency		120°
4000K	4200	150	230							
5700K	4200	150	230							
38W	3000K	5320	140	230						
	4000K	5700	150	230						
5700K	5700	150	230							
48W	3000K	6720	140	230						
	4000K	7200	150	230						
	5700K	7200	150	230						
	56W	3000K	7840	140	230					
		4000K	8400	150	230					
	5700K	8400	150	230						
BT6NEM	White	On-Off Manual Test	120°	33W	3000K	4690	142	200		
					4000K	5025	152	200		

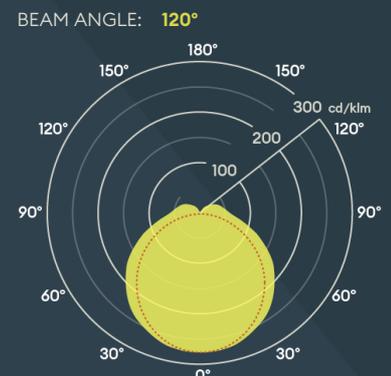

1233mm (4ft)

1533mm (5ft)

1833mm (6ft)

77mm  
73mm



Default Settings: 4000K colour temperature, 37W power consumption. \*Replace 'N' at the end of the part code with: 'NEM' for Manual-test emergency models | 'D' for DALI-2/PUSH DIM | 'V' for 0-10V | Plug in kits also available as separate accessories. Energy rating is a reflection of the LED light source.

## WIRING INFORMATION

<b>Cable Required for Connector</b>	N/A
<b>Type of Wiring Required</b>	Parallel

## ACCESSORIES

<b>ACKITMANEM</b>	Manual Test Emergency plug-in Versabox	Sold Separately
<b>ACKITSELFEM</b>	Self Test Emergency plug-in Versabox	Sold Separately
<b>ACKITMWS</b>	Microwave Sensor on/off Plug-in Kit	Sold Separately
<b>ACKITMWSDIM</b>	Microwave Sensor Dim plug-in Versabox (requires 0-10V driver)	Sold Separately
<b>ACREMOTEMWS</b>	Remote for Microwave Sensor	Sold Separately
<b>CASBOLT7W</b>	Casambi Wireless M20 Conduit Entry PIR+DL White 7m (requires 0-10V driver)	Sold Separately
<b>BTSK1</b>	Suspension kit	Sold Separately

Bringing further versatility to the commercial offering at Collingwood, our range of Borealis Versa provides the ultimate batten with a variety of kits, from microwave sensors to manual test emergencies, DALI emergencies, and self-test emergencies. Also available in 0-10V, DALI-2 Dimmable, or On/Off to suit a project. The streamlined linear fixture, available in three lengths, allows you to create a uniform installation of perfectly distributed light. Designed with the installer in mind, this range is quick and easy to fit, keeping use of tools to a minimum. It also provides various wiring options, particularly useful in retrofit applications.