

All-in-one Driver for  
RGBW/RGB Systems

24v DC Output

Receives RF signal

## WARRANTY

Warranty

5 years


## FEATURES & BENEFITS

4 channel 24V DC Constant Voltage Output

Multiple control inputs

Max. 4.16A/CH, CH1+CH2+CH3+CH4=4.16A

Power repeaters (PR3002) are required for RF installations with multiple zones that want to colour cycle. Requires driver.

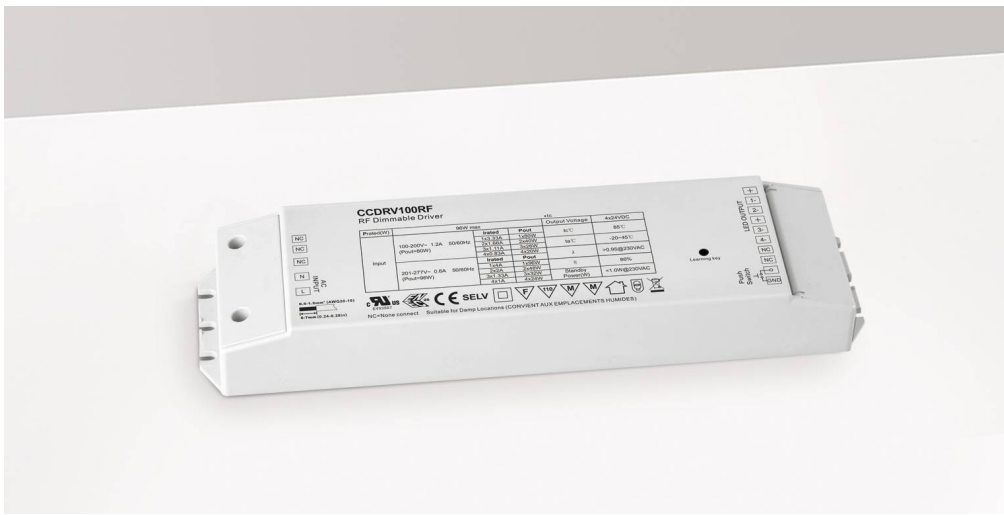

# CCDRV100RF

100W RF Driver

## FEATURES

<b>IP rating</b>	IP20
------------------	------

## INSTALLATION INFORMATION

<b>Input</b>	220-240V AC
<b>Maximum Ambient Temperature</b>	-25°C - 40°C
<b>Inrush Current</b>	COLD START Max. 50A at 230VAC
<b>UK Bathroom Zone</b>	1
<b>SELV</b>	Yes
<b>Electric Class (1, 2, 3)</b>	II
<b>Power Factor</b>	0.9

## Electrical Characteristics

Driver Rated Wattage	Driver Input Voltage	Drive Current	Driver Output Voltage	Power Factor
100	100-240V AC	max 4.16A	24	0.9

## ACCESSORIES

<b>CCREMOTEB</b>	Handheld remote control	Sold Separately
<b>CCRFCONWIFI</b>	Colour Change RF-WIFI Wall Covertor, 12VDC	Sold Separately
<b>CR575RGBW</b>	5-Core PVC Cable	Sold Separately
<b>LEDRGBWEXT</b>	Colour Change 5-core extension lead for RGBW products	Sold Separately