



IP65 IP65 suitable for use outside

IK10 IK10

Wattage & CCT Switchable

CADDY

Colour & wattage switchable multi-purpose bulkhead

FEATURES

IP rating	IP65
IK rating	IK10
CSP Switchable	Switchable CCT
Sensor Option	Microwave (Step-Dim)
LED Lifetime	L70 B10 50,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM5

INSTALLATION INFORMATION

Input	220-240V AC
Maximum Ambient Temperature	-20°C - 45°C
Weight	0.78kg
Inrush Current	TBC
Construction Material	PC
UK Bathroom Zone	2
Electric Class (1, 2, 3)	II
Install Connector Type	Push-fit terminal, loop-in/loop-out
UK Building Regulations	Part L
Mounting Options	Ceiling & wall
Power Factor	0.5

WARRANTY


Warranty	5 years
Battery Warranty	5 years
On-Site Warranty	2 years

FEATURES & BENEFITS

- Slim depth of just 78mm
- Sensor Live-out terminal for master slave operation.
- 4-way conduit entry points & BESA
- Plug and play sensors to accommodate project requirements.
- Hinged gear tray for ease of installation.
- High efficacy, up to 130lm/W
- Anti-tamper mechanism built into diffuser.
- Emergency luminaire with dual manual & self test capability - select via switch.

Photometrics @ 25°C

Product Code	Finish	Type	Beam	W	Colour	lm	lm/W	Energy
WL77WCC	White	On-Off	120°	9W	3000K	1125	125	
					4000K	1150	128	
					6500K	1150	128	
				12W	3000K	1525	127	
					4000K	1550	129	
					6500K	1550	129	
				16W	3000K	2040	128	
					4000K	2080	130	
					6500K	2080	130	
WL77WCEM	White	Emergency	120°	9W	3000K	1125	125	
					4000K	1150	128	
					6500K	1150	128	
				12W	3000K	1525	127	
					4000K	1550	129	
					6500K	1550	129	
				16W	3000K	2040	128	
					4000K	2080	130	
					6500K	2080	130	

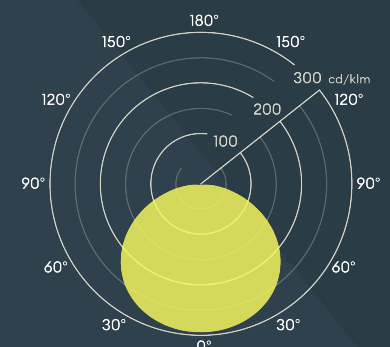

WIRING INFORMATION

Type of Wiring Required	Parallel
--------------------------------	----------

