




CCT switchable between
3000K, 4000K & 5700K



Wattage Switchable



IP66 for external use

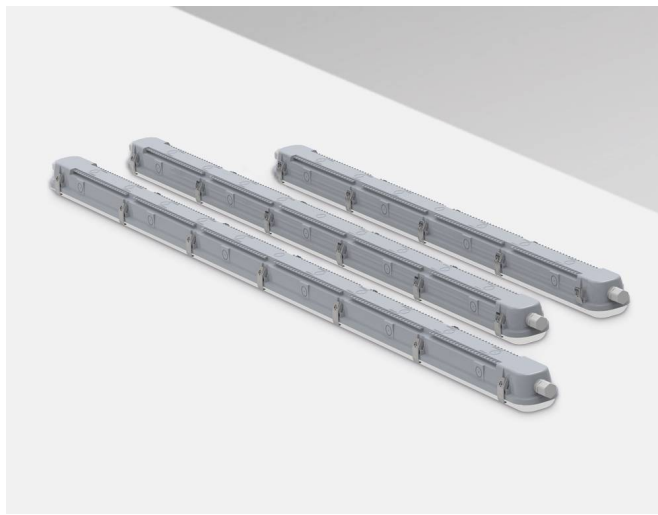

CAIMAN QUICK CONNECT

Wire a side mains cable entry without needing to open luminaire (product is through-wired)

FEATURES

| | |
|------------------------|----------------|
| IP rating | IP66 |
| IK rating | IK10 |
| CSP Switchable | Switchable CCT |
| Sensor Option | MW On-Off |
| Dimmable Option | No |
| LED Lifetime | L70 100,000h |
| Colour Rendering Index | CRI>80 |
| Colour Consistency | SDCM6 |
| Emergency Option | No |

INSTALLATION INFORMATION

| | |
|-----------------------------|--|
| Input | 220-240V AC |
| Maximum Ambient Temperature | -20°C - 35°C |
| Weight | 1.3 - 2.15kg |
| Inrush Current | 16A 0.51ms |
| Construction Material | Polycarbonate Housing (RAL7005), Anti-UV Diffuser |
| SELV | No |
| Electric Class (1, 2, 3) | 1 |
| Install Connector Type | Removeable, moveable, loop in/out |
| UK Building Regulations | Part L |
| Power Factor | 0.9 |

Photometrics @ 25°C

| Product Code | Type | Beam | W | Colour | lm | lm/W | EM lm | Energy |
|--------------|--------------------------|------|-----|--------|-------|------|-------|--------|
| AC4TWN | 4ft (1200mm) Standard | 120° | 18W | 3000K | 2590 | 144 | - | |
| | | | | 4000K | 2775 | 154 | - | |
| | | | | 5700K | 2775 | 154 | - | |
| | | | 37W | 3000K | 5180 | 144 | - | |
| | | | | 4000K | 5550 | 154 | - | |
| | | | | 5700K | 5550 | 154 | - | |
| AC5TWN | 5ft (1500mm) Standard | 120° | 28W | 3000K | 3920 | 140 | - | |
| | | | | 4000K | 4200 | 150 | - | |
| | | | | 5700K | 4200 | 150 | - | |
| | | | 56W | 3000K | 7840 | 140 | - | |
| | | | | 4000K | 8400 | 150 | - | |
| | | | | 5700K | 8400 | 150 | - | |
| AC6TWN | 6ft (1800mm) Standard | 120° | 33W | 3000K | 4690 | 142 | - | |
| | | | | 4000K | 5025 | 152 | - | |
| | | | | 5700K | 5025 | 152 | - | |
| | | | 67W | 3000K | 9380 | 140 | - | |
| | | | | 4000K | 10050 | 150 | - | |
| | | | | 5700K | 10050 | 150 | - | |

WIRING INFORMATION

| | |
|------------------------------|----------|
| Cable Required for Connector | N/A |
| Type of Wiring Required | Parallel |

ACCESSORIES

| | | |
|----------|---|-----------------|
| ACKITMWS | Microwave Sensor on/off Plug-in Kit (Assembled on demand by Collingwood Production) | Sold Separately |
|----------|---|-----------------|

WARRANTY

| | |
|------------------|---------|
| Warranty | 7 years |
| Battery Warranty | 5 years |
| On-Site Warranty | 2 years |

FEATURES & BENEFITS

Unique full length mounting slider allows complete freedom of mounting positions

Quick connect through-wired version for side entry to avoid opening the product

Versabox plug and play microwave sensor kit to automate lights off when no presence is detected

Rear and side housing conduit entry points


All installation points are marked on the outside of the luminaire to aid accurate pre-drilling, BESA mount accessory (ACBESA) sold separately

Supplied with mounting clips, hanging bracket and compression glands at either end of luminaire


ACKITMWS must be assembled by Collingwood Production only.

PATENT: **Patent Pending**


600mm (2ft)




1200mm (4ft)



1500mm (5ft)



1800mm (6ft)



92.3mm
Ø 73mm