



Colour switchable between 2700K, 3000K and 4000K



High efficacy of 101lm/W



Insulation coverable

## WARRANTY

Warranty

7 years

## FEATURES & BENEFITS

Fire-rated in both I-Joist and solid timber ceilings

20° adjustable downlight to adjust direction of light

UGR 21 for low glare

Available in mains dimming or 1-10V

Compatible with magnetic reflectors (sold separately), Supplied with silver reflector

Quick and easy installation with plug and play connector

Emergency version available

When using a converter plate, the IP rating is not affected; however, the product is no longer fire-rated.

PATENT: **GB2461935 GB2475649 GB2481542 EP2350527 NZ592254 HK1153907**



# H5 1000

Mains dimmable, fire-rated, adjustable, colour switchable downlight

## FEATURES

IP rating	IP65
CSP Switchable	Switchable CCT
Tilttable (°)	20
UGR	UGR<22
Sensor Option	No
Dimmable Option	Yes
LED Lifetime	L70 70,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM4
Emergency Option	Yes
Rotation angle (°)	Fixed

## INSTALLATION INFORMATION

Input	220-240V AC
Maximum Ambient Temperature	40°C
Weight	562g
Insulation Coverable	No
Inrush Current	2A 30ms
Cut Out Size	110-115
Construction Material	Mild steel / PC
UK Bathroom Zone	1 (ceiling only)
Maximum ceiling thickness	40 mm
SELV	Yes
Electric Class (1, 2, 3)	II
Suitable for coastal areas	No
Install Connector Type	Plug & Play
UK Building Regulations	Part B, C, E & P
FR Building Regulations	RE2020, EN 13141-1:2004, EN 1365-2:2014, EN ISO 10140-2/3:2010
Part B Fire Rating	Solid Timber 30min, I-Joist 30min

## Photometrics @ 25°C



Product Code	Finish	Type	Beam	W	Colour	lm	lm/W	lx@1m	Energy
DL510MWM	Matt white	Mains	70°	10W	2700K	950	95	745	AIG E
					3000K	960	96	753	
					4000K	1010	101	792	
DL510BSM	Brushed steel	Mains	70°	10W	2700K	950	95	745	AIG E
					3000K	960	96	753	
					4000K	1010	101	792	
DL510CRM	Polished chrome	Mains	70°	10W	2700K	950	95	745	AIG E
					3000K	960	96	753	
					4000K	1010	101	792	
DL510BSD	Brushed steel		70°	10W	2700K	950	95	745	AIG E
					3000K	960	96	753	
					4000K	1010	101	792	
DL510MWD	Matt white		70°	10W	2700K	950	95	745	AIG E
					3000K	960	96	753	
					4000K	1010	101	792	

Energy rating is a reflection of the LED light source.

## WIRING INFORMATION

Cable / Flying Lead	0.2m
Cable Required for Connector	Twin & Earth (6242Y 2x1.5mm <sup>2</sup> ) or 3-core cable (R02V 3x1.5mm <sup>2</sup> )
Type of Wiring Required	Parallel

BEAM ANGLE: 70°

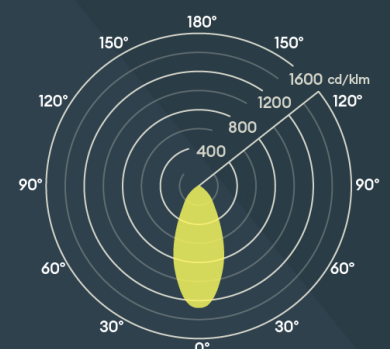

## LED DRIVER

Driver	Input	SELV	Dimming	Bathroom Zone
N/A (integrated SELV driver)	220-240V	Yes	Yes	1 (Ceiling only)

## ACCESSORIES

<b>H5REF</b>	H5 reflector range	Sold Separately
<b>DM298FP</b>	Faceplate dimmer	Sold Separately
<b>DM298GRID</b>	Grid dimmer	Sold Separately
<b>DLCVT170</b>	H5 converter plate	Sold Separately
<b>LEDEP10</b>	Emergency converter	Sold Separately



**COLLINGWOOD**  
LIGHTING

### LIGHTING INNOVATION

The renewed and refreshed H5 1,000 range has all the very latest features, benefits and LED technology. It is colour switchable, via a switch on the top of the fitting, with 2700K, 3000K and 4000K available to be selected before or during installation. It is adjustable up to 20 degrees to allow you to highlight features, as well as being fire rated and I-Joist approved for peace of mind after installation. Choose from different bezels and magnetic reflectors to create the desired fitting for your application.