

Colour switchable between 2700K, 3000K and 4000K



Wattage Switchable between 4W & 6W



Switches allow you to choose

H4 LITE CSP

Colour & Wattage Switchable using switches on bottom of product

FEATURES

| | |
|-------------------------------|-------------------------------------|
| IP rating | IP65 (from below) IP20 (from above) |
| CSP Switchable | Switchable CCT |
| Tiltable | 30° |
| UGR | UGR<25 |
| Dimmable Option | Yes (TRIAC) |
| LED Lifetime | L70 60,000h |
| Colour Rendering Index | CRI>80 |
| Colour Consistency | SDCM4 |
| Emergency Option | No |
| Rotation Angle | No |

INSTALLATION INFORMATION

| | |
|------------------------------------|---|
| Input | 220-240V AC |
| Maximum Ambient Temperature | -20°C - 40°C |
| Weight | 235g |
| Insulation Coverable | Rolled and blown insulation |
| Double Insulation | Yes |
| Inrush Current | 1.4A |
| Cut Out Size | 70mm - 72mm |
| Construction Material | Mild steel / V0 rated plastic |
| UK Bathroom Zone | 1 |
| Maximum ceiling thickness | 40 mm |
| SELV | No |
| Electric Class (1, 2, 3) | 2 |
| Suitable for coastal areas | No |
| Install Connector Type | 2 part first fit connector |
| UK Building Regulations | Part B, C, E, P & L RE2020, EN 13141-1:2004, EN 1365-2:2014, EN ISO 10140-2/3:2010 |
| FR Building Regulations | 1365-2:2014, EN ISO 10140-2/3:2010 |
| Mounting Options | Recessed Solid Timber 30/60/90min, I-Joist 30min, Metal Web 30min |
| Part B Fire Rating | 30min |
| Power Factor | 0.85 |

WARRANTY

Warranty

7 years

FEATURES & BENEFITS

Tiltable to highlight features on walls

2-part connector provides first fix wiring whilst the luminaire is detached from the connector, loop in loop out, quick maintenance should disconnection/reconnection be required

High efficacy of 130lm/W

Compatible with Click Flow CT100 series


TRIAC Mains dimmable

Fixed with 55 degree beam angle

Photometrics @ 25°C

| Product Code | Finish | Beam | W | Colour | lm | lm/W | Energy |
|--------------|----------------------|------|----|--------|-----|------|--------|
| DLT661600A | White bezel included | 55° | 4W | 2700K | 450 | 112 | AIG D |
| | | | | 3000K | 520 | 130 | |
| | | | | 4000K | 500 | 125 | |
| | | | 6W | 2700K | 650 | 108 | |
| | | | | 3000K | 750 | 125 | |
| | | | | 4000K | 720 | 120 | |

BEAM ANGLE: 55°

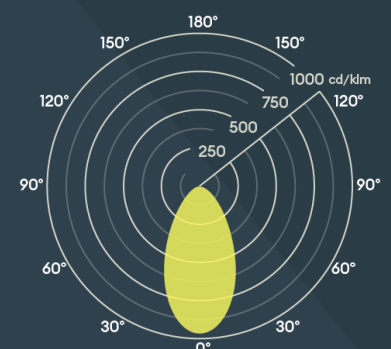

WIRING INFORMATION

| | |
|-------------------------------------|--|
| Cable / Flying Lead | 0.75mm ² - 2.5mm ² 3 core cable for connector |
| Cable Required for Connector | Push-fit terminal for: Twin & Earth (6242Y 2x1.5mm ²) or 3-core cable (R02Y 3x1.5mm ²) |
| Type of Wiring Required | Parallel |

ACCESSORIES

| | | |
|--------------------|------------------------------------|-----------------|
| DLT661BLKBZ | Black Bezel | Sold Separately |
| DLT661BSBZ | Brushed Steel Bezel | Sold Separately |
| DLCVT110 | Concealer ring for larger cut outs | Sold Separately |
| DM298FP | Faceplate dimmer | Sold Separately |
| DM298GRID | Grid dimmer | Sold Separately |

