



SPIRA 3 RX

Adjustable round recessed spotlight

Features

IP rating	IP23
IK rating	IK04
CSP Switchable	Single CCT
Tilttable	80°
UGR	UGR<22
Dimmable Option	No
LED Lifetime	L70 50,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM7
Emergency Option	No
Rotation Angle	350°

Installation Information

Input	220-240V AC
Maximum Ambient Temperature	-25°C - 50°C
Weight	1.720
Insulation Coverable	No
Inrush Current	N/A
Cut Out Size	215
Construction Material	Cast Aluminium
UK Bathroom Zone	N/A
Maximum ceiling thickness	20 mm
SELV	Yes
Electric Class (1, 2, 3)	2
Part B Fire Rating	No

Photometrics @ 25°C

Product Code	Finish	W	Beam	lm	lm/W	Energy
DO344NW04	White	60W	40°	8680	118	

Energy rating is a reflection of the LED light source.

Wiring Information

Cable / Flying Lead	0.75-2.5mm ²
Cable Required for Connector	0.75-1.0 mm ²
Type of Wiring Required	Parallel

LED Driver

Driver	Input	SELV	Dimming	Bathroom Zone
N/A (driver built in)	220-240V	Yes	No	N/A

Accessories

N/A	No accessories required	Sold Separately
-----	-------------------------	-----------------



collingwood

IP20 Perfect for internal applications

350° Adjustable with a 350° rotation

>80Ra CRI 80 providing true colour appearance


Guarantee

Warranty 3 years

Features & benefits

- IP23 perfect for indoor applications
- High efficacy of 118lm/W
- Adjustable with a 80° tilt
- 350° adjustable downlight to adjust direction of light

Beam angle: 40°

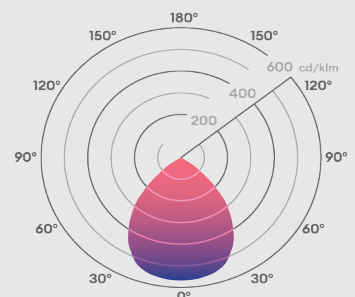

Ø235mm

