

**IP68**

IP68 suitable for full submersion into water

**IK08**

IK08 for protection against high impact



Suitable for coastal C5 and high acid and alkali environment

## WARRANTY

Warranty

5 years

## FEATURES & BENEFITS

316 Stainless steel housing provides outstanding corrosion resistance

Clear but strong 8mm tempered glass cover provides high efficiency and clear colour accuracy

TRIAC mains dimmable as standard with RGBW option



Pre-wired with 5 metres of cable to aid the installer

To be installed under water to prevent over-heating

1 1/2" BSP thread enables installation onto fabricated pipework

RGBW version available

BEAM ANGLE: **35°**

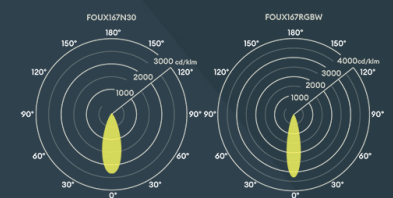

# FOUNTAIN

Water feature light

## FEATURES

IP rating	IP68
IK rating	IK08
CSP Switchable	Single CCT
Sensor Option	No
Dimmable Option	No
LED Lifetime	L70 50,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM3
Emergency Option	No
Walk Over / Drive Over	Walk over

## INSTALLATION INFORMATION

Input	24V DC
Maximum Ambient Temperature	-25°C - 40°C
Weight	3.37Kg
Inrush Current	N/A
Cut Out Size	167
Construction Material	316 Stainless Steel
UK Bathroom Zone	0, 1 (with dimming)
SELV	Yes
Electric Class (1, 2, 3)	III
Earth Leakage	N/A
Suitable for coastal areas	Yes
Install Connector Type	Flying lead
Mounting Options	1 1/2" BSP thread

## Photometrics @ 25°C

Product Code	Finish	Beam	W	Colour	lm	lm/W	lx@1m	Energy
FOUX167N30	Stainless steel 316	35°	25W	3000K	1700	68	4057	

Energy rating is a reflection of the LED light source.

## WIRING INFORMATION

Cable / Flying Lead	Pre-wired 5.0M H05RN-F, 2x1.0mm <sup>2</sup>
Type of Wiring Required	Parallel

## LED DRIVER

Driver	Input	SELV	Dimming	Bathroom Zone	Min	Max
PSIP15024	220-240V	Yes	Yes (with PDCINT 1-10V)	N/A	1	6
LSD12024	220-240V	Yes	No	Outside zones	1	4
PSIP25024	220-240V	Yes	No	0	1	10

## ACCESSORIES

JB5	Gel filled waterproof connector	Sold Separately
-----	---------------------------------	-----------------