




1W at 350mA or 2W at 700mA



Coastal protected



Low voltage step light

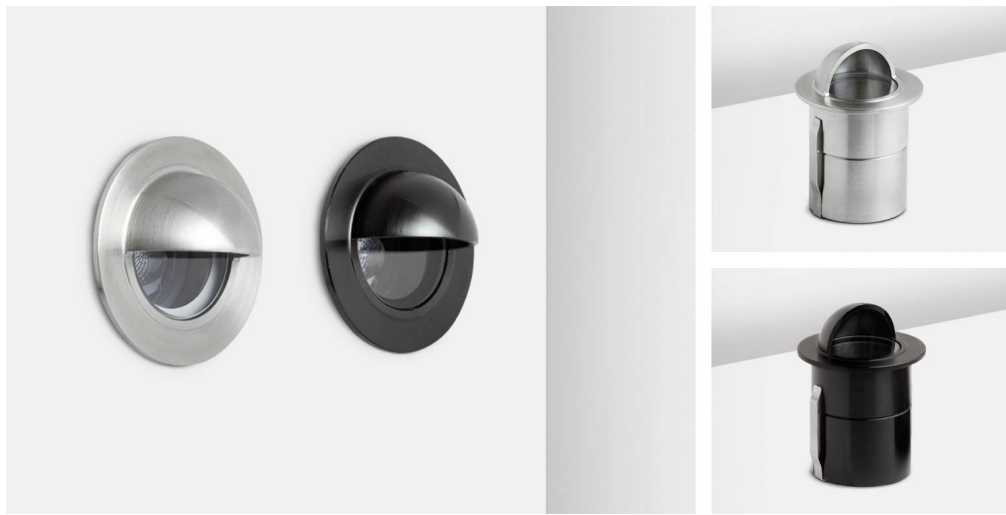

GL019 EYELID

Asymmetric beam angle with zero upward light spill

FEATURES

IP rating	IP68
IK rating	Other
CSP Switchable	Single CCT
LED Lifetime	L70 70,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM3
Walk Over / Drive Over	No

INSTALLATION INFORMATION

Input	350mA / 700mA DC
Maximum Ambient Temperature	50°C
Weight	204g
Inrush Current	N/A
Cut Out Size	33
Construction Material	Stainless steel (316)
UK Bathroom Zone	0
SELV	N/A
Electric Class (1, 2, 3)	III
Earth Leakage	N/A
Suitable for coastal areas	Yes

WARRANTY

Warranty

7 years

FEATURES & BENEFITS

Asymmetric beam angle

0% upward light spill

Recess into a wall, floor or ceiling

Suitable for indoor and outdoor use

33mm cut-out size

PATENT: [GB2544975 EP3176502](#)

Photometrics @ 25°C

Product Code	Finish	Beam	W	Colour	lm	lm/W	lx@1m	Energy
GL019E30SS	Stainless steel	50°	1W (350mA)	3000K	41	41	3.5	
			2W (700mA)	3000K	72	36	3.5	
GL019E27SS	Stainless steel	50°	1W (350mA)	2700K	36	36	3.1	
			2W (700mA)	2700K	63	31	3.1	
GL019E30BL	Black	50°	1W (350mA)	3000K	36	36	2.1	
			2W (700mA)	3000K	64	32	2.1	
GL019E27BL	Black	50°	1W (350mA)	2700K	31	31	1.8	
			2W (700mA)	2700K	56	28	1.8	

50°

WIRING INFORMATION

Cable / Flying Lead	1m (H05RN-F) rubberised cable (outside diameter: 6mm)
Type of Wiring Required	Series

LED DRIVER

Driver	Input	SELV	Dimming	Bathroom Zone	Min	Max
DRV150700 (all settings)	220-240V	Yes	No	N/A		
DRV350700TD (700mA)	220-240V	Yes	Yes	N/A		
PSIP70018W	220-240V	Yes	No	0	1	8

ACCESSORIES

JB2 / JB4 / JB6	IP68 waterproof connectors	Sold Separately
TUBE332	Installation tube	Sold Separately

