




Stainless Steel



Antique Brass

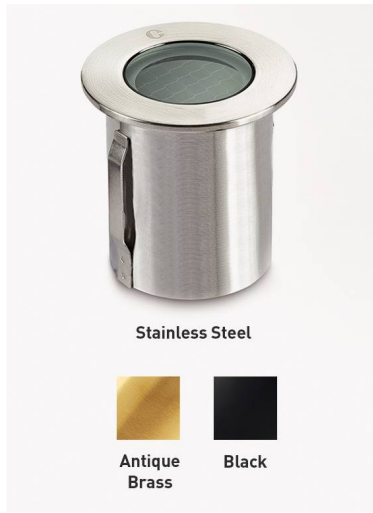

Black

GL019 LOW GLARE

Low Voltage Ground Light

FEATURES

IP rating	IP68
IK rating	IK06
CSP Switchable	Single CCT
Tiltable (°)	Fixed
LED Lifetime	L70 70,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM3
Walk Over / Drive Over	Walk over

INSTALLATION INFORMATION

Input	150mA / 250mA / 350mA / 500mA / 700mA DC
Maximum Ambient Temperature	55°C
Weight	GL019AB: 220g, GL019BK: 140g, GL019SS: 210g
Inrush Current	N/A
Cut Out Size	33mm
Construction Material	Stainless Steel
UK Bathroom Zone	0
SELV	N/A
Electric Class (1, 2, 3)	III
Earth Leakage	N/A
Suitable for coastal areas	Yes

Photometrics @ 25°C

Product Code	Finish	Beam	W	Colour	lm	lm/W	Energy
GL019SSLG22S	Stainless steel 316	12°	0.4W (150mA)	2200K	31	74	
			0.7W (250mA)	2200K	49	68	
			1W (350mA)	2200K	66	66	
			1.5W (500mA)	2200K	91	61	
			2.2W (700mA)	2200K	120	55	
GL019SSLG27S	Stainless steel 316	12°	0.4W (150mA)	2700K	31	74	
			0.7W (250mA)	2700K	49	68	
			1W (350mA)	2700K	66	66	
			1.5W (500mA)	2700K	91	61	
			2.2W (700mA)	2700K	120	55	
GL019SSLG30S	Stainless steel 316	12°	0.4W (150mA)	3000K	33	79	
			0.7W (250mA)	3000K	53	73	
			1W (350mA)	3000K	71	71	
			1.5W (500mA)	3000K	98	65	
			2.2W (700mA)	3000K	128	58	
GL019SSLG40S	Stainless steel 316	12°	0.4W (150mA)	4000K	37	87	
			0.7W (250mA)	4000K	58	81	
			1W (350mA)	4000K	79	79	
			1.5W (500mA)	4000K	109	72	
			2.2W (700mA)	4000K	143	65	
GL019SSLG22F	Stainless steel 316	30°	0.4W (150mA)	2200K	31	74	
			0.7W (250mA)	2200K	49	68	
			1W (350mA)	2200K	66	66	
			1.5W (500mA)	2200K	91	61	
			2.2W (700mA)	2200K	120	55	

IP68 IP68 perfect for internal or external applications

 Coastal protected

IK06 IK06 impact protection - walk over (Stainless Steel only)

WARRANTY

Warranty 7 years

FEATURES & BENEFITS

Supplied complete with installation tube

Low voltage ground light

SDCM3 ensuring uniform light appearance and consistency

CRI 80 providing true colour appearance



Available in a new 2200K setting to create a warm and cosy environment with minimal disruption to natural habitat

Compact yet powerful fitting

Robust cable for outdoor use

Available in an array of colours

BEAM ANGLE: 12°

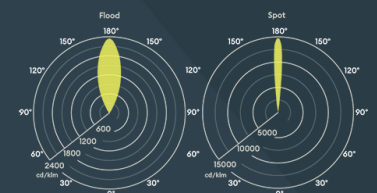

GL019SSLG27F	Stainless steel 316	30°	0.4W (150mA)	2700K	31	74	
			0.7W (250mA)	2700K	49	68	
			1W (350mA)	2700K	66	66	
			1.5W (500mA)	2700K	91	61	
			2.2W (700mA)	2700K	120	55	
GL019SSLG30F	Stainless steel 316	30°	0.4W (150mA)	3000K	33	79	
			0.7W (250mA)	3000K	53	73	
			1W (350mA)	3000K	71	71	
			1.5W (500mA)	3000K	98	65	
			2.2W (700mA)	3000K	128	58	
GL019SSLG40F	Stainless steel 316	30°	0.4W (150mA)	4000K	37	87	
			0.7W (250mA)	4000K	58	81	
			1W (350mA)	4000K	79	79	
			1.5W (500mA)	4000K	109	72	
			2.2W (700mA)	4000K	143	65	
GL019ABLG22S	Antique brass	12°	0.4W (150mA)	2200K	31	74	
			0.7W (250mA)	2200K	49	68	
			1W (350mA)	2200K	66	66	
			1.5W (500mA)	2200K	91	61	
			2.2W (700mA)	2200K	120	55	
GL019ABLG27S	Antique brass	12°	0.4W (150mA)	2700K	31	74	
			0.7W (250mA)	2700K	49	68	
			1W (350mA)	2700K	66	66	
			1.5W (500mA)	2700K	91	61	
			2.2W (700mA)	2700K	120	55	
GL019ABLG30S	Antique brass	12°	0.4W (150mA)	3000K	33	79	
			0.7W (250mA)	3000K	53	73	
			1W (350mA)	3000K	71	71	
			1.5W (500mA)	3000K	98	65	
			2.2W (700mA)	3000K	128	58	
GL019ABLG40S	Antique brass	12°	0.4W (150mA)	4000K	37	87	
			0.7W (250mA)	4000K	58	81	
			1W (350mA)	4000K	79	79	
			1.5W (500mA)	4000K	109	72	
			2.2W (700mA)	4000K	143	65	
GL019ABLG22F	Antique brass	30°	0.4W (150mA)	2200K	31	74	
			0.7W (250mA)	2200K	49	68	
			1W (350mA)	2200K	66	66	
			1.5W (500mA)	2200K	91	61	
			2.2W (700mA)	2200K	120	55	
GL019ABLG27F	Antique brass	30°	0.4W (150mA)	2700K	31	74	
			0.7W (250mA)	2700K	49	68	
			1W (350mA)	2700K	66	66	
			1.5W (500mA)	2700K	91	61	
			2.2W (700mA)	2700K	120	55	
GL019ABLG30F	Antique brass	30°	0.4W (150mA)	3000K	33	79	
			0.7W (250mA)	3000K	53	73	
			1W (350mA)	3000K	71	71	
			1.5W (500mA)	3000K	98	65	
			2.2W (700mA)	3000K	128	58	
GL019ABLG40F	Antique brass	30°	0.4W (150mA)	4000K	37	87	
			0.7W (250mA)	4000K	58	81	
			1W (350mA)	4000K	79	79	
			1.5W (500mA)	4000K	109	72	

WIRING INFORMATION

2.2W (700mA) 4000K 143 65

Cable / Flying Lead	1m (H05RN-F) rubberised cable (outside diameter: 6mm)
Type of Wiring Required	Series

LED DRIVER

Driver	Input	SELV	Dimming	Bathroom Zone
DRV150700 (all settings)	220-240V	Yes	No	N/A
DRV350700TD (350 & 500mA)	220-240V	Yes	Yes	N/A
DRV350700TD (700mA)	220-240V	Yes	Yes	N/A

ACCESSORIES

JB2 / JB4 / JB6	IP68 waterproof connectors	Sold Separately
WCR 275 BLACK	2-core rubber cable	Sold Separately



COLLINGWOOD
LIGHTING

LIGHTING INNOVATION