



GL019

Up to 2W, 180lm mini ground light

FEATURES

IP rating	IP68
IK rating	IK06
CSP Switchable	Single CCT
Tiltable (°)	Fixed
LED Lifetime	L70 70,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM3
Walk Over / Drive Over	Walk over

INSTALLATION INFORMATION

Input	350mA / 700mA DC
Maximum Ambient Temperature	50°C
Weight	204g
Inrush Current	N/A
Cut Out Size	33
Construction Material	Stainless steel (316)
UK Bathroom Zone	0
Electric Class (1, 2, 3)	III
Earth Leakage	N/A
Suitable for coastal areas	Yes

Photometrics @ 25°C

Product Code	Finish	Type	Beam	W	Colour	lm	lm/W	lx@1m	Energy
GL019 F NW	Stainless steel	Flood Beam	38°	1W (350mA)	4000K	100	100	356	A1G F
				2W (700mA)	4000K	180	90	356	
GL019 S NW	Stainless steel	Spot Beam	12°	1W (350mA)	4000K	100	100	1715	A1G F
				2W (700mA)	4000K	180	90	1715	
GL019 S WW	Stainless steel	Spot Beam	12°	1W (350mA)	3000K	90	90	1543	A1G F
				2W (700mA)	3000K	150	75	1543	
GL019 F 27	Stainless steel	Flood Beam	38°	1W (350mA)	2700K	80	80	285	A1G F
				2W (700mA)	2700K	130	65	285	
GL019 S 27	Stainless steel	Spot Beam	12°	1W (350mA)	2700K	80	80	1372	A1G F
				2W (700mA)	2700K	130	65	1372	
GL019 F AMBER	Stainless steel	Flood Beam	38°	1W (350mA)	Amber	20	20	88	
GL019 F BLUE	Stainless steel	Flood Beam	38°	1W (350mA)	Blue	15	15	66	
				2W (700mA)	Blue	25	13	66	
GL019 F RED	Stainless steel	Flood Beam	38°	1W (350mA)	Red	35	35	154	
				2W (700mA)	Red	-	-	154	
GL019BNBX40	Black	Spot Beam	12°	1W (350mA)	4000K	100	100	356	A1G F
				2W (700mA)	4000K	180	90	356	
GL019BNBXBL	Black	Spot Beam	12°	1W (350mA)	Blue	15	15	306	
				2W (700mA)	Blue	25	13	306	
GL019BWBX40	Black	Flood Beam	38°	1W (350mA)	4000K	100	100	356	A1G F
				2W (700mA)	4000K	180	90	356	
GL019BWBXBL	Black	Flood Beam	38°	1W (350mA)	Blue	15	15	66	
				2W (700mA)	Blue	25	13	66	
GL019AWBX30	Antique brass	Flood Beam	38°	1W (350mA)	3000K	90	90	320	A1G F
				2W (700mA)	3000K	150	75	320	
GL019ANBX30	Antique brass	Spot Beam	12°	1W (350mA)	3000K	90	90	1543	A1G F
				2W (700mA)	3000K	150	75	1543	



1W at 350mA or 2W at 700mA



Coastal protected



Low voltage ground light

WARRANTY

Warranty

7 years



FEATURES & BENEFITS

Compact yet powerful fitting

Shallow depth for easy installation

Robust cable for outdoor use

BEAM ANGLE: 12°

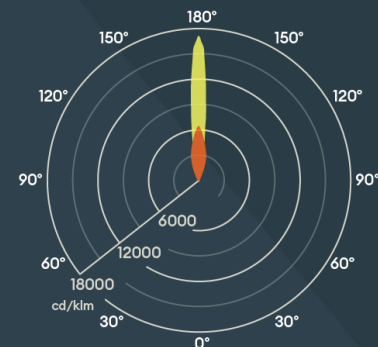

Discreet yet powerful, this 1W LED powered ground light is perfect for decking areas, entrance halls and pathways. Indoors or out, the IP68 Stainless Steel finish ground light will give a flawless performance for many years of maintenance free operation. Available in four ambient LED colours, the GL019 is the most popular ground light in the Collingwood range.

WIRING INFORMATION

Cable / Flying Lead	1m (H05RN-F) rubberised cable (outside diameter: 6mm)
Type of Wiring Required	Series
Input Cable Type	H05RN-F (6MM OD) 2 CORE

LED DRIVER

Driver	Input	SELV	Dimming	Bathroom Zone	Min	Max
PSIP70018W	220-240V	Yes	No	0	1	8

ACCESSORIES

JB2 / JB4 / JB6	IP68 waterproof connectors	Sold Separately
TUBE332	Installation tube	Sold Separately
PDC/GRID DIMMER	Grid dimmer kit for multiple fitting types	Sold Separately