



1W at 350mA or 2W at
700mA



Coastal protected



Low voltage ground light

WARRANTY

Warranty

7 years

FEATURES & BENEFITS

Square baffle for a different decorative effect

Shallow depth for easy installation

Marine-grade stainless steel 316



GL019 SQ

Up to 2W, 130lm square mini ground light

FEATURES

IP rating	IP68
IK rating	IK06
CSP Switchable	Single CCT
Tiltable (°)	Fixed
LED Lifetime	L70 70,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM3
Walk Over / Drive Over	Walk over

INSTALLATION INFORMATION

Input	350mA / 700mA DC
Maximum Ambient Temperature	50°C
Weight	134g
Inrush Current	N/A
Cut Out Size	33
Construction Material	Stainless steel (316)
UK Bathroom Zone	0
Electric Class (1, 2, 3)	III
Earth Leakage	N/A
Suitable for coastal areas	Yes

Photometrics @ 25°C

Product Code	Finish	Beam	W	Colour	lm	lm/W	lx@1m	Energy
GL019 SQ F NW	Stainless steel	20°	1W (350mA)	4000K	90	35	396	
			2W (700mA)	4000K	130	-	396	
GL019 SQ S NW	Stainless steel	12°	1W (350mA)	4000K	90	90	1833	
			2W (700mA)	4000K	130	65	1833	
GL019 SQ F WW	Stainless steel	20°	1W (350mA)	3000K	80	90	353	
			2W (700mA)	3000K	125	65	353	
GL019 SQ F BLUE	Stainless steel	20°	1W (350mA)	Blue	10	90	44	
			2W (700mA)	Blue	20	65	44	
GL019 SQ S BLUE	Stainless steel	12°	1W (350mA)	Blue	10	10	204	
			2W (700mA)	Blue	20	10	204	

Energy rating is a reflection of the LED light source.

WIRING INFORMATION

Cable / Flying Lead	1m (H05RN-F) rubberised cable (outside diameter: 6mm)
Type of Wiring Required	Series
Input Cable Type	H05RN-F (6MM OD) 2 CORE


LED DRIVER

Driver	Input	SELV	Dimming	Bathroom Zone	Min	Max
PSIP70018W	220-240V	Yes	No	0	1	8

ACCESSORIES

JB2 / JB4 / JB6	IP68 waterproof connectors	Sold Separately
TUBE332	Installation tube	Sold Separately
PDC/GRID DIMMER	Grid dimmer kit for multiple fitting types	Sold Separately

BEAM ANGLE: 20°

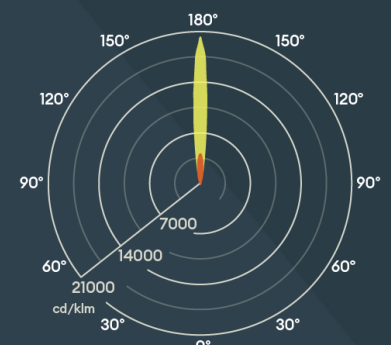

40x40mm

