


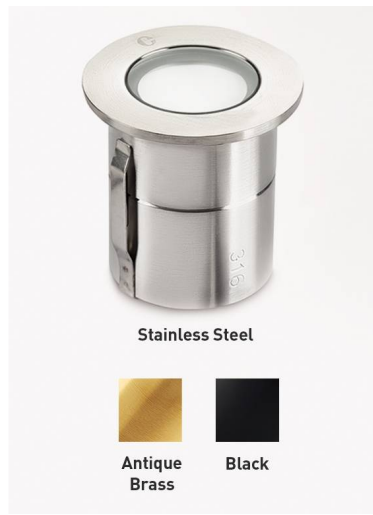

IP68 IP68 perfect for internal or external applications

 Coastal protected

IK06 IK06 impact protection - walk over (Stainless Steel only)

GL019 FROSTED

Low Voltage Ground Light

FEATURES

IP rating	IP68
IK rating	IK06
CSP Switchable	Single CCT
Tiltable (°)	Fixed
LED Lifetime	L70 70,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM3
Walk Over / Drive Over	Walk over

INSTALLATION INFORMATION

Input	150mA / 250mA / 350mA DC
Maximum Ambient Temperature	55°C
Weight	GL019AB: 220g, GL019BK: 140g, GL019SS: 210g
Inrush Current	N/A
Cut Out Size	33mm
Construction Material	Stainless Steel
UK Bathroom Zone	0
SELV	N/A
Electric Class (1, 2, 3)	III
Earth Leakage	N/A
Suitable for coastal areas	Yes

Photometrics @ 25°C

Product Code	Finish	Beam	W	Colour	lm	lm/W	Energy
GL019SSFD22	Stainless steel 316	100°	0.4W (150mA)	2200K	11	27	
			0.7W (250mA)	2200K	19	27	
			1W (350mA)	2200K	27	27	
GL019SSFD27	Stainless steel 316	100°	0.4W (150mA)	2700K	13	33	
			0.7W (250mA)	2700K	23	33	
			1W (350mA)	2700K	32	32	
GL019SSFD30	Stainless steel 316	100°	0.4W (150mA)	3000K	13	33	
			0.7W (250mA)	3000K	23	33	
			1W (350mA)	3000K	32	32	
GL019SSFD40	Stainless steel 316	100°	0.4W (150mA)	4000K	13	33	
			0.7W (250mA)	4000K	23	33	
			1W (350mA)	4000K	32	32	
GL019ABFD22	Antique brass	100°	0.4W (150mA)	2200K	11	27	
			0.7W (250mA)	2200K	19	27	
			1W (350mA)	2200K	27	27	
GL019ABFD27	Antique brass	100°	0.4W (150mA)	2700K	13	33	
			0.7W (250mA)	2700K	23	33	
			1W (350mA)	2700K	32	32	
GL019ABFD30	Antique brass	100°	0.4W (150mA)	3000K	13	33	
			0.7W (250mA)	3000K	23	33	
			1W (350mA)	3000K	32	32	
GL019ABFD40	Antique brass	100°	0.4W (150mA)	4000K	13	33	
			0.7W (250mA)	4000K	23	33	
			1W (350mA)	4000K	32	32	
GL019BKFD22	Black	100°	0.4W (150mA)	2200K	11	27	
			0.7W (250mA)	2200K	19	27	


WARRANTY

Warranty 7 years

FEATURES & BENEFITS

- Supplied complete with installation tube
- Low voltage ground light
- SDCM3 ensuring uniform light appearance and consistency
- CRI 80 providing true colour appearance
- Available in a new 2200K setting to create a warm and cosy environment with minimal disruption to natural habitat
- Compact yet powerful fitting
- Robust cable for outdoor use
- Available in an array of colours

PATENT: **GB2544975 EP3176502**



GL019BKFD27	Black	100°	1W (350mA)	2200K	27	27	
			0.4W (150mA)	2700K	13	33	
			0.7W (250mA)	2700K	23	33	
			1W (350mA)	2700K	32	32	
GL019BKFD30	Black	100°	0.4W (150mA)	3000K	13	33	
			0.7W (250mA)	3000K	23	33	
			1W (350mA)	3000K	32	32	
GL019BKFD40	Black	100°	0.4W (150mA)	4000K	13	33	
			0.7W (250mA)	4000K	23	33	
			1W (350mA)	4000K	32	32	

Energy rating is a reflection of the LED light source.

WIRING INFORMATION

Cable / Flying Lead	1m (H05RN-F) rubberised cable (outside diameter: 6mm)
Type of Wiring Required	Series

LED DRIVER

Driver	Input	SELV	Dimming	Bathroom Zone
DRV150700 (150-350mA)	220-240V	Yes	No	N/A
DRV350700TD (350mA)	220-240V	Yes	Yes	N/A
PSIP35018W	220-240V	Yes	No	1

ACCESSORIES

JB2 / JB4 / JB6	IP68 waterproof connectors	Sold Separately
WCR 275 BLACK	2-core rubber cable	Sold Separately