



360-degree lit effect



IK10 perfect for external use



CCT switchable between
3000K, 4000K & 5700K

WARRANTY

Warranty

5 years

FEATURES & BENEFITS


HALO lit effect provides a 360-degree soft glow around the product to help the entrance of your building create interest and appear welcoming

Set to 3000K as standard to minimise low blue light content and disruption to the nocturnal ecosystem

Option to have integral microwave sensor to automatically switch the light OFF during daylight and when there is no presence to save energy


Emergency product (only) features a simple push-button to make it easy to test the battery status

Suitable for use in a coastal application

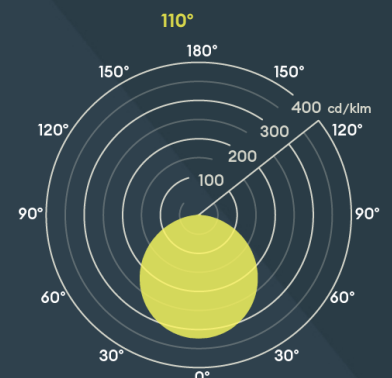

Ø275mm

67mm

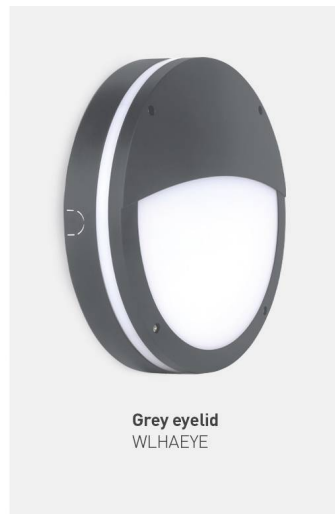

Grey eyelid
WLHAEYE

HALO WALL LIGHT

12W Wall Light CSP Switchable

FEATURES

IP rating	IP65
IK rating	IK10
CSP Switchable	Switchable CCT
Sensor Option	Microwave
Dimmable Option	No
LED Lifetime	L70 50,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM6
Emergency Option	Yes
Walk Over / Drive Over	No

INSTALLATION INFORMATION

Input	220-240V AC
Maximum Ambient Temperature	-20°C - 45°C
Weight	WLHAIN: 0.72kg WLHAINE: 0.81kg WLHA1M: 0.77kg WLHA1ME: 0.86kg
Inrush Current	7.36A 0.03ms
Construction Material	Polycarbonate
UK Bathroom Zone	2
Electric Class (1, 2, 3)	II
Earth Leakage	N/A
Suitable for coastal areas	Yes
Install Connector Type	Loop in / Loop out
Mounting Options	Wall
Power Factor	0.9

Photometrics @ 25°C

Product Code	Finish	Type	Beam	W	Colour	lm	lm/W	lx@1m	EM lm	Energy
WLHAIN	Anthracite grey RAL7016	Standard	110°	12W	3000K	1250	104	409	-	
					4000K	1300	108	425	-	
					5700K	1350	113	441	-	
WLHAINE	Anthracite grey RAL7016	Emergency	110°	12W	3000K	1250	104	409	200	
					4000K	1300	108	425	200	
					5700K	1350	113	441	200	
WLHA1M	Anthracite grey RAL7016	Microwave sensor	110°	12W	3000K	1250	104	409	-	
					4000K	1300	108	425	-	
					5700K	1350	113	441	-	
WLHA1ME	Anthracite grey RAL7016	Emergency Microwave sensor	110°	12W	3000K	1250	104	409	200	
					4000K	1300	108	425	200	
					5700K	1350	113	441	200	

Energy rating is a reflection of the LED light source.

WIRING INFORMATION

Cable / Flying Lead	2x 6242Y 1.5mm ² Twin and Earth Cables or H05RN-F 3x 1.0mm ²
Type of Wiring Required	Parallel

ACCESSORIES

WLHAEYE	Halo Wall Light CCT Anthracite Eyelid Accessory	Sold Separately
---------	---	-----------------