




Colour Switchable between
3000K-3500K-4000K



Contributes to a UGR19
lighting design



Energy efficient up to
130Lm/W

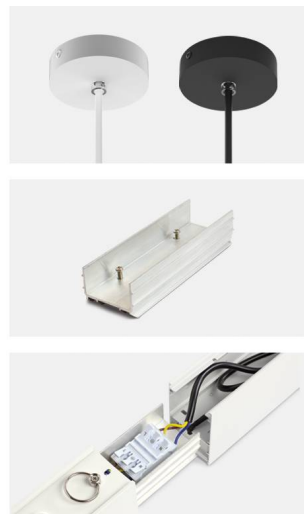

LINEAR CELL 4FT

Low glare suspended light line luminaire

Photometrics @ 25°C

Product Code	Finish	Type	Beam	W	Colour	lm	lm/W	Ix@1m	EM lm	Energy
LCLWID	White RAL9003	DALI-2 dimmable	75°	38W	3000K	4600	120	4070	-	A t G B
					3500K	5000	130	4375	-	
					4000K	4800	126	4300	-	
LCLWIDEM	White RAL9003	Emergency DALI-2 dimmable	75°	38W	3000K	4600	120	4070	300	A t G B
					3500K	5000	130	4375	325	
					4000K	4800	126	4300	315	
LCLBSID	Matt black RAL9017	DALI-2 dimmable	70°	38W	3000K	4600	120	4070	-	A t G B
					3500K	5000	130	4375	-	
					4000K	4800	126	4300	-	
LCLBSIDEM	Matt black RAL9017	Emergency DALI-2 dimmable	70°	38W	3000K	4600	120	4070	300	A t G B
					3500K	5000	130	4375	325	
					4000K	4800	126	4300	315	

Default Settings: 3000K colour temperature, 40W power consumption. Energy rating is a reflection of the LED light source.

BEAM ANGLE: 70°

