
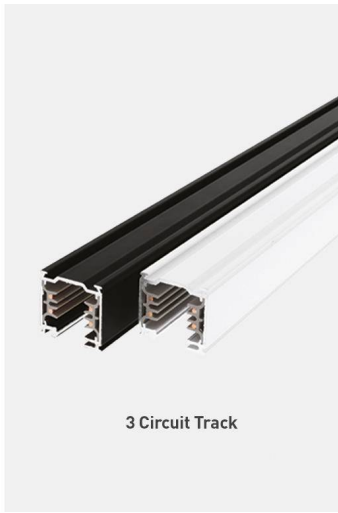


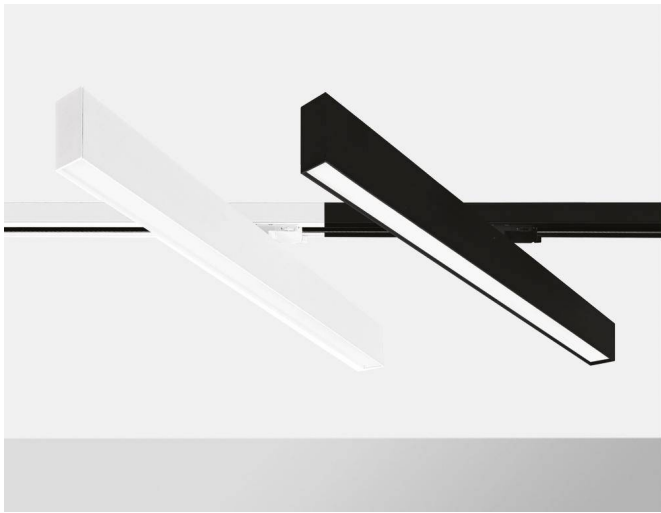

3 Circuit Track

LINEA 1

Linear structure for diffuse lighting

FEATURES

IP rating	IP20
IK rating	IK04
CSP Switchable	Single CCT
Tiltable (°)	90
Dimmable Option	No
LED Lifetime	L70 B50 50,000h
Colour Rendering Index	CRI>80
Rotation angle (°)	360

INSTALLATION INFORMATION

Input	220-240V AC
Weight	1.15Kg
Construction Material	Aluminium
Electric Class (1, 2, 3)	I
Mounting Options	On Track

PHOTOMETRICS @ 25°C

Product code	Finish	W	Colour	Beam	lm	lm/W	Energy
TR357WW05	Black	30W	3000K	120°	3190	106	A t G D
TR357WW30	White	30W	3000K	120°	3190	106	A t G D
TR357NW05	Black	30W	4000K	120°	3270	109	A t G D
TR357NW30	White	30W	4000K	120°	3270	109	A t G D

IP20

IP20 perfect for indoor installations

CRI>80

CRI 80 providing true colour appearance

DIM

Non-dimmable converter built in the device

WARRANTY

Warranty

3 years

FEATURES & BENEFITS

Optional honeycomb grid

360 degree rotation to direct light

