



Colour switchable between 2700k, 3000k, & 4000k



Energy efficient up to 138lm/W



Available with DALI-2, 1-10V & PUSH-DIM

## WARRANTY

Warranty	5 years
On-Site Warranty	2 years

## FEATURES & BENEFITS

- Wide light emitting surface designed for superior optical control and comfortable light
- Makes rooms appear larger and wider
- Floating impression when surface-mounted
- Design-led pendant can be centrepiece of any room
- Wall mounted creates interest
- 450mm and 600mm can be wall mounted
- 4000K for focus scenes - 3000K for social scenes - 2700K for relaxation



# NOVA CSP

Designer light that can be suspended, surface or wall mounted

## FEATURES


IP rating	IP40
IK rating	IK06
CSP Switchable	Switchable CCT
UGR	UGR<19
Sensor Option	On Request
Dimmable Option	Yes (DALI-2, 1-10V, PUSH-DIM)
LED Lifetime	L70 50,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM5
Emergency Option	Yes, remotely using Salvus Route

## INSTALLATION INFORMATION

Input	220-240V AC
Maximum Ambient Temperature	-20°C - 50°C
Weight	3.8kg
Inrush Current	4.9A 154ms
Construction Material	Aluminium housing, Microprism lens
Electric Class (1, 2, 3)	II
Install Connector Type	Push-fit terminals 0,5 - 1,5mm <sup>2</sup>
UK Building Regulations	Part P & L
Mounting Options	Ceiling & suspended
Power Factor	0.95

## Photometrics @ 25°C

Product Code	Finish	Type	Beam	W	Colour	lm	lm/W	Energy
NVB45DS	Black - gold	450mm	120°	26W	2700K	2600	100	A t G D
					3000K	2800	108	
					4000K	3000	115	
NVB60DS	Black - gold	600mm	120°	40W	2700K	4200	117	A t G D
					3000K	4500	125	
					4000K	4800	133	
NVB90DS	Black - gold	900mm	120°	68W	2700K	7900	122	A t G D
					3000K	8300	128	
					4000K	9000	138	
NVW45DS	White - gold	450mm	120°	26W	2700K	2600	108	A t G D
					3000K	2800	117	
					4000K	3000	125	
NVW60DS	White - gold	600mm	120°	40W	2700K	4200	117	A t G D
					3000K	4500	125	
					4000K	4800	133	
NVW90DS	White - gold	900mm	120°	68W	2700K	7900	122	A t G D
					3000K	8300	128	
					4000K	9000	138	

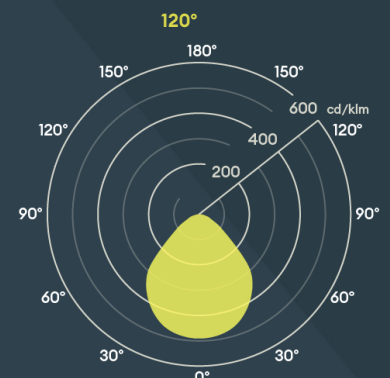

Energy rating is a reflection of the LED light source.

## WIRING INFORMATION

Cable / Flying Lead	0.75-1.5mm <sup>2</sup>
Type of Wiring Required	Parallel

## ACCESSORIES

NV45UPM	Nova Uplight Kit, 450mm, 13W 1100lm, On-Off, 3000K	Sold Separately
NV60UPM	Nova Uplight Kit, 600mm, 20W 1700lm, On-Off, 3000K	Sold Separately





**COLLINGWOOD**  
LIGHTING

LIGHTING INNOVATION

Designer light that can be surface mounted to create a floating effect, suspended to be a centrepiece of a room or wall mounted to create interest. Colour switchable as standard, Nova as be a cool 4000K white, neutral 3000K or warm and inviting 2700K.

<b>NV90UPM</b>	Nova Uplight Kit, 900mm, 28W 2400lm, On-Off, 3000K	Sold Separately
<b>NVBSUS2M</b>	Nova Pendant Kit Black, 2 metres, 5 core cable	Sold Separately
<b>NVWSUS2M</b>	Nova Pendant Kit White, 2 metres, 5 core cable	Sold Separately
<b>EMRBST</b>	Salvus Route Black, Self Test, Open Corridor Lens	Sold Separately
<b>EMRWST</b>	Salvus Route White, Self Test, Open Corridor Lens	Sold Separately