



## LUXI 54

Rectangular terminal bollard

### Features

IP rating	IP54
IK rating	IK08
CSP Switchable	Single CCT
Sensor Option	No
LED Lifetime	L70 50,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM6

### Installation Information

Input	220-240V AC
Maximum Ambient Temperature	-20°C - 40°C
Weight	2.130
Inrush Current	N/A
Construction Material	Aluminium
UK Bathroom Zone	N/A
SELV	No
Electric Class (1, 2, 3)	1
Suitable for coastal areas	No

### Photometrics @ 25°C

Product Code	Finish	W	Colour	Beam	lm	lm/W	Energy
OUI3624	Anthracite grey RAL7016	7W	3000K	90°	750	75	

### Wiring Information

Cable / Flying Lead	cable diameter for connection 12mm
Cable Required for Connector	max. cable diameter 12mm
Type of Wiring Required	Parallel

### LED Driver

Driver	Input	SELV	Dimming	Bathroom Zone
N/A (intergrated driver)	220-240V	No	N/A	N/A

### Accessories

N/A (No Accessories required)
-------------------------------



collingwood



7W



IP54 ideal for walk ways and step lighting



CRI 80 providing true colour appearance


### Guarantee

Warranty 3 years

### Features & benefits

- IK08 for robust impact protection
- Great for soft illumination onto stone paths
- Anthracite RAL 7016

Beam angle: 90°

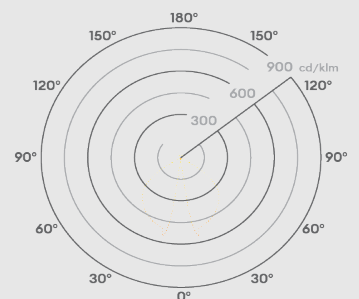

160mm 54mm

