



## POLAS VERSA

Colour switchable Batten with IP66 protection perfect for all applications

### FEATURES

IP rating	IP66
IK rating	IK10
CSP Switchable	Switchable CCT
UGR	UGR<22
Sensor Option	Microwave & PIR options
Dimmable Option	Yes (DALI)
LED Lifetime	L80 50,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM4
Emergency Option	No

### INSTALLATION INFORMATION

Input	220-240V AC
Maximum Ambient Temperature	-20°C - 40°C
Weight	1kg
Inrush Current	30.5A 280us
Construction Material	Anti-UV Polycarbonate
SELV	No
Electric Class (1, 2, 3)	I
Install Connector Type	Push-fit terminal, loop-in/loop-out
UK Building Regulations	Part P
Mounting Options	Ceiling
Power Factor	0.9

### Photometrics @ 25°C

Product Code	Finish	Type	Beam	W	Colour	lm	lm/W	Energy
POL30104	White	Standard	120°	43W	3000K	6300	149	
					4000K	6600	153	
					6500K	6500	153	
POL30304	White	DALI Dimmable	120°	43W	3000K	6400	149	
					4000K	6600	153	
					6500K	6500	153	

Energy rating is a reflection of the LED light source.

### WIRING INFORMATION

Cable Required for Connector	N/A
Type of Wiring Required	Parallel

### ACCESSORIES

POL30504	Polas Versa PIR Sensor	Sold Separately
----------	------------------------	-----------------



Colour switchable between 3000K 4000K & 6500K



IP66 for total dust ingress protection



IK10 rated high resistance against impact and vandalism

### WARRANTY

Warranty	5 years
On-Site Warranty	2 years

### FEATURES & BENEFITS

Tool-less installation method making for a fast installation


Designed for industrial and residential applications

Lightweight for easy handling


Through-wired as standard so luminaires when wired together light up as a group

Mounting brackets slide entire length of luminaire to help make refurbishment easier

BEAM ANGLE: 120°

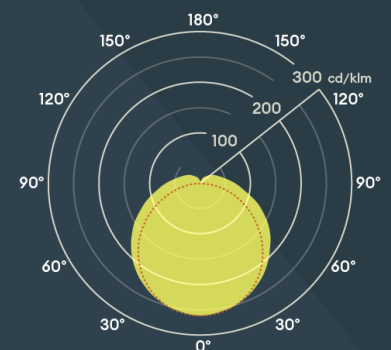

1600mm



65mm

