



1W at 350mA or 2W at 700mA



Coastal protected



IP65 ideal for outdoor areas

## WARRANTY

Warranty


7 years

## FEATURES & BENEFITS

Long spike included for extra stability

Robust cable for outdoor use

Small & discreet

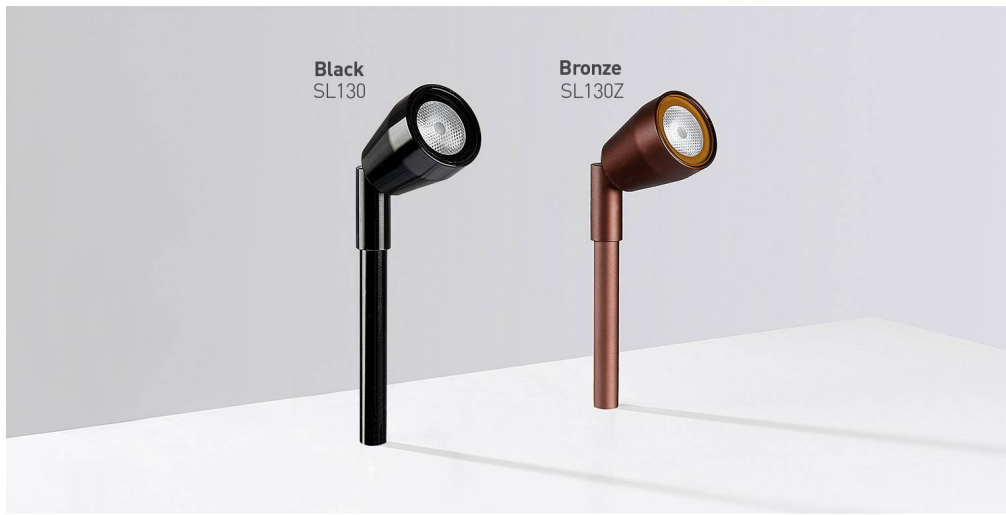

## SL130

1W LED spike light

### FEATURES

<b>IP rating</b>	IP65
<b>CSP Switchable</b>	Single CCT
<b>Tilttable (°)</b>	90
<b>Dimmable Option</b>	Driver dependent
<b>LED Lifetime</b>	L70 70,000h
<b>Colour Rendering Index</b>	CRI>80
<b>Colour Consistency</b>	SDCM3
<b>Rotation angle (°)</b>	Fixed

### INSTALLATION INFORMATION

<b>Input</b>	350mA / 700mA DC
<b>Maximum Ambient Temperature</b>	35°C
<b>Weight</b>	405g
<b>Inrush Current</b>	N/A
<b>Construction Material</b>	Anodised aluminium
<b>UK Bathroom Zone</b>	1
<b>SELV</b>	N/A
<b>Electric Class (1, 2, 3)</b>	III
<b>Earth Leakage</b>	N/A
<b>Suitable for coastal areas</b>	Yes

### Photometrics @ 25°C

Product Code	Finish	Colour	Beam	W	lm	lm/W	lx @ 1m	W	lm	lm/W	lx @ 1m	Energy
				<b>350mA</b>				<b>700mA</b>				
<b>SL13040</b>	Black anodised aluminium	4000K	26°	1W	95	95	267	2W	140	70	393	
<b>SL13030</b>	Black anodised aluminium	3000K	26°	1W	75	75	210	2W	135	68	379	
<b>SL13027</b>	Black anodised aluminium	2700K	26°	1W	70	70	196	2W	120	60	337	
<b>SL130ZMBX27</b>	Bronze anodised aluminium	2700K	26°	1W	70	70	196	2W	120	60	337	
<b>SL130ZMBX30</b>	Bronze anodised aluminium	3000K	26°	1W	75	75	210	2W	135	68	379	

### WIRING INFORMATION

<b>Cable / Flying Lead</b>	3m H05RN-F rubberised cable (outside diameter: 6mm)
<b>Type of Wiring Required</b>	Series
<b>Input Cable Type</b>	(H05RN-F) rubberised cable (outside diameter: 6mm)

### LED DRIVER

Driver	Input	SELV	Dimming	Bathroom Zone	Min	Max
DRV150700 (all settings)	220-240V	Yes	No	N/A		
DRV350700TD (700mA)	220-240V	Yes	Yes	N/A		
PSIP70018W	220-240V	Yes	No	1	1	8

### ACCESSORIES

<b>JB2 / JB4 / JB6</b>	Waterproof junction box / Gel filled waterproof connectors	Sold Separately
<b>WCR 275 BLACK</b>	2-core rubber cable	Sold Separately

