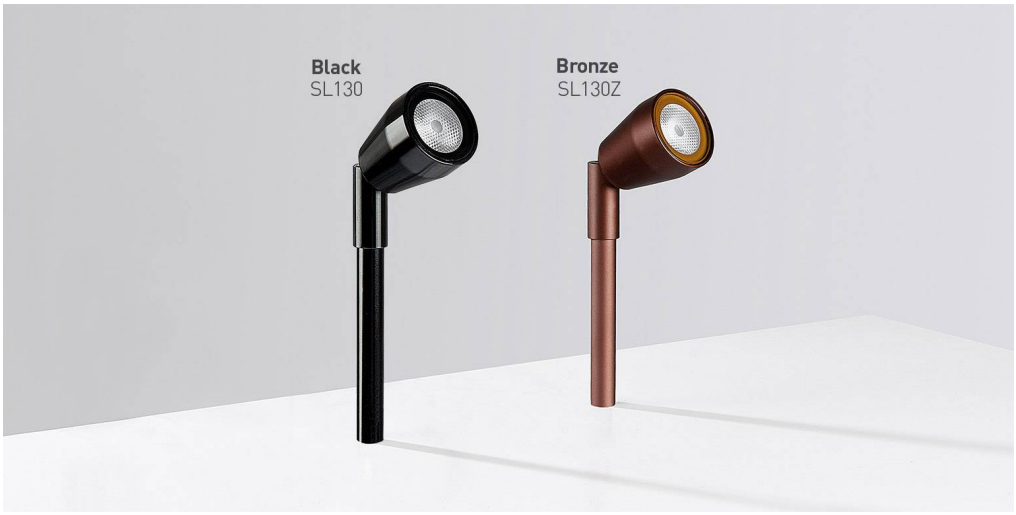


SL130

1W LED spike light

FEATURES

IP rating	IP65
CSP Switchable	Single CCT
Tiltable (°)	90
Dimmable Option	Driver dependent
LED Lifetime	L70 70,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM3
Rotation angle (°)	Fixed

INSTALLATION INFORMATION

Input	350mA / 700mA DC
Maximum Ambient Temperature	35°C
Weight	400g
Inrush Current	N/A
Construction Material	Anodised aluminium
UK Bathroom Zone	1
SELV	N/A
Electric Class (1, 2, 3)	III
Earth Leakage	N/A
Suitable for coastal areas	Yes

Photometrics @ 25°C

Product Code	Finish	Colour	Beam	W	lm	lm/W	lx @ 1m	W	lm	lm/W	lx @ 1m	Energy
				350mA				700mA				
SL13040	Black anodised aluminium	4000K	26°	1W	95	95	267	2W	140	70	393	F
SL13030	Black anodised aluminium	3000K	26°	1W	75	75	210	2W	135	68	379	F
SL13027	Black anodised aluminium	2700K	26°	1W	70	70	196	2W	120	60	337	F
SL130ZMBX27	Bronze anodised aluminium	2700K	26°	1W	70	70	196	2W	120	60	337	F
SL130ZMBX30	Bronze anodised aluminium	3000K	26°	1W	75	75	210	2W	135	68	379	F

Energy rating is a reflection of the LED light source.

WIRING INFORMATION

Cable / Flying Lead	3m H05RN-F rubberised cable (outside diameter: 6mm)
Type of Wiring Required	Series
Input Cable Type	(H05RN-F) rubberised cable (outside diameter: 6mm)

LED DRIVER

Driver	Input	SELV	Dimming	Bathroom Zone	Min	Max
DRV150700 (all settings)	220-240V	Yes	No	N/A		
DRV350700TD (700mA)	220-240V	Yes	Yes	N/A		
PSIP70018W	220-240V	Yes	No	1	1	8

ACCESSORIES

JB2 / JB4 / JB6	Waterproof junction box / Gel filled waterproof connectors	Sold Separately
WCR 275 BLACK	2-core rubber cable	Sold Separately

COLLINGWOOD
LIGHTING

LIGHTING INNOVATION

1W or 2W — 1W at 350mA or 2W at 700mA

Coastal protected

IP65 — IP65 ideal for outdoor areas

WARRANTY

Warranty 7 years

FEATURES & BENEFITS

- Long spike included for extra stability
- Robust cable for outdoor use
- Small & discreet

BEAM ANGLE: **26°**

