COLLINGWOOD
LIGHTING

LIGHTING INNOVATION

5.7W — 5.7W

Coastal protected

IP65 — IP65 ideal for outdoor areas

# SL220 MAINS VOLTAGE

Mains Voltage LED Spike light

## FEATURES

| | |
|---|---|
| **IP rating** | IP65 |
| **CSP Switchable** | Single CCT |
| **Tiltable (°)** | 90 |
| **Dimmable Option** | No |
| **LED Lifetime** | L70 70,000h |
| **Colour Rendering Index** | CRI>80 |
| **Colour Consistency** | SDCM3 |
| **Rotation angle (°)** | Fixed |

## INSTALLATION INFORMATION

| | |
|---|---|
| **Input** | 220-240V AC |
| **Maximum Ambient Temperature** | 55°C |
| **Weight** | SL220AB: TBC, SL220BK: 714g, SL220SS: 1156g, SL220BZ: 694g |
| **Inrush Current** | 0.07ms 5.2A |
| **Construction Material** | Aluminium |
| **UK Bathroom Zone** | N/A |
| **SELV** | Yes |
| **Electric Class (1, 2, 3)** | I |
| **Earth Leakage** | 0.1 |
| **Suitable for coastal areas** | Yes |

## WARRANTY

| | |
|---|---|
| Warranty | 7 years |

## FEATURES & BENEFITS

- Tiltable for flexible lighting direction to help suit any installation
- SDCM3 ensuring uniform light appearance and consistency
- Single LED and lens combination for maximum efficiency and optimal light distribution
- Choice of material finish to suit different styles

## PHOTOMETRICS @ 25°C

| Product code | Finish | Type | W | Colour | Beam | lm | lm/W | Energy |
|---|---|---|---|---|---|---|---|---|
| SL220BZ22MS | Bronze | Mains | 5.7W | 2200K | 12° | 431 | 76 | E |

Energy rating is a reflection of the LED light source.

## WIRING INFORMATION

| | |
|---|---|
| **Cable / Flying Lead** | 3m H05RN-F rubberised cable (outside diameter: 6mm) |
| **Type of Wiring Required** | Parallel |

## ACCESSORIES

| | | |
|---|---|---|
| **JB5** | Gel filled waterproof connector | Sold Separately |
| **GH220** | Simple hood to reduce glare whilst maintaining a good light distribution | Sold Separately |
| **GS220** | Stylish, baffle-style snoot, perfect for creating a moonlighting effect | Sold Separately |
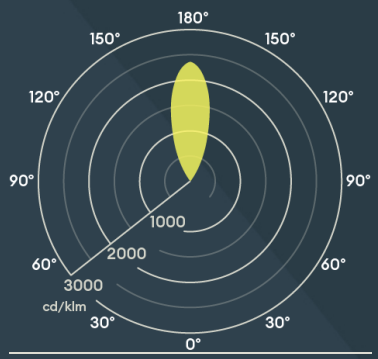
BEAM ANGLE: 12°