


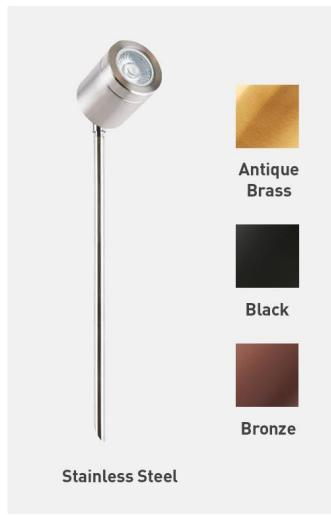

## SL220 MAINS VOLTAGE

Mains Voltage LED Spike light

### FEATURES

|                        |             |
|------------------------|-------------|
| IP rating              | IP65        |
| CSP Switchable         | Single CCT  |
| Tilttable (°)          | 90          |
| Dimmable Option        | No          |
| LED Lifetime           | L70 70,000h |
| Colour Rendering Index | CRI>80      |
| Colour Consistency     | SDCM3       |
| Rotation angle (°)     | Fixed       |

### INSTALLATION INFORMATION

|                             |                                     |
|-----------------------------|-------------------------------------|
| Input                       | 220-240V AC                         |
| Maximum Ambient Temperature | 55°C                                |
|                             | SL220AB: TBC, SL220BK:              |
| Weight                      | 714g, SL220SS: 1156g, SL220BZ: 694g |
| Inrush Current              | 0.07ms 5.2A                         |
| Construction Material       | Stainless Steel 316                 |
| UK Bathroom Zone            | N/A                                 |
| SELV                        | Yes                                 |
| Electric Class (1, 2, 3)    | I                                   |
| Earth Leakage               | 0.1                                 |
| Suitable for coastal areas  | Yes                                 |

### PHOTOMETRICS @ 25°C

| Product code | Finish          | Type  | W    | Colour | Beam | lm  | lm/W | Energy |
|--------------|-----------------|-------|------|--------|------|-----|------|--------|
| SL220SS27MS  | Stainless steel | Mains | 5.7W | 2700K  | 12°  | 515 | 90   |        |
| SL220SS30MS  | Stainless steel | Mains | 5.7W | 3000K  | 12°  | 520 | 91   |        |
| SL220SS40MS  | Stainless steel | Mains | 5.7W | 4000K  | 12°  | 538 | 94   |        |
| SL220SS22MF  | Stainless steel | Mains | 5.7W | 2200K  | 40°  | 431 | 76   |        |
| SL220SS27MF  | Stainless steel | Mains | 5.7W | 2700K  | 40°  | 515 | 90   |        |
| SL220SS30MF  | Stainless steel | Mains | 5.7W | 3000K  | 40°  | 520 | 91   |        |
| SL220SS40MF  | Stainless steel | Mains | 5.7W | 4000K  | 40°  | 538 | 94   |        |
| SL220AB22MS  | Antique brass   | Mains | 5.7W | 2200K  | 12°  | 431 | 76   |        |
| SL220AB27MS  | Antique brass   | Mains | 5.7W | 2700K  | 12°  | 515 | 90   |        |
| SL220AB30MS  | Antique brass   | Mains | 5.7W | 3000K  | 12°  | 520 | 91   |        |

Energy rating is a reflection of the LED light source.

### WIRING INFORMATION

|                         |                                                     |
|-------------------------|-----------------------------------------------------|
| Cable / Flying Lead     | 3m H05RN-F rubberised cable (outside diameter: 6mm) |
| Type of Wiring Required | Parallel                                            |

### ACCESSORIES

|       |                                                                          |                 |
|-------|--------------------------------------------------------------------------|-----------------|
| JB5   | Gel filled waterproof connector                                          | Sold Separately |
| GH220 | Simple hood to reduce glare whilst maintaining a good light distribution | Sold Separately |
| GS220 | Stylish, baffle-style snoot, perfect for creating a moonlighting effect  | Sold Separately |

**5.7W** 5.7W

 Coastal protected

**IP65** IP65 ideal for outdoor areas

### WARRANTY

Warranty 7 years

### FEATURES & BENEFITS

Tilttable for flexible lighting direction to help suit any installation

SDCM3 ensuring uniform light appearance and consistency

Single LED and lens combination for maximum efficiency and optimal light distribution

Choice of material finish to suit different styles

BEAM ANGLE: **40°**

