
# **Spike lights** specification sheet

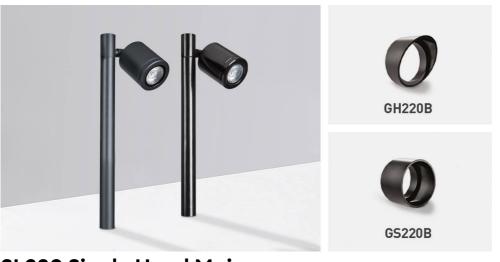

# **SL230 Single Head Mains**

Mains voltage single head LED spike light

Features	
IP rating	IP65
CSP Switchable	Single CCT
Tiltable	90°
LED Lifetime	L70 70,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM3
Rotation Angle	330°

Installation Information				
Input	220-240V AC			
Maximum Ambient Temperature	50°C			
Weight	1.18			
Inrush Current	60A 37⊠s (SLM230SH)			
Construction Material	Anodised aluminium			
UK Bathroom Zone	N/A			
SELV	SELV			
Electric Class (1, 2, 3)	1			
Earth Leakage	0.1mA			
Suitable for coastal areas	Yes			

#### Photometrics @ 25°C

Product Code	Finish	w	Colour	Beam	lm	lm/W	Lx @ 1m	Energy
SLM230SHB30	Black	5.7W	3000K	40°	520	91	1182	A f G
SLM230SHA30	Anthracite	5.7W	3000K	40°	520	91	1182	A t G

# **Wiring Information**

N/A (integrated SELV driver)

Cable / Flying Lead	3m H05RN-F rubberised cable (outside diameter: 7mm)
Type of Wiring Required	Parallel
Input Cable Type	(H05RN-F) 3 CORE rubberised cable (OD: 7mm)

### **LED Driver**

GS220

Accessories		
JB5	Gel filled waterproof connector	Sold Separately
GH220	Simple hood to reduce glare whilst maintaining a good light distribution	Sold Separately
00000	Simple hood to reduce glare whilst maintaining a good light	C.1.1.C

220-240V





5.7W



Coastal protected



IP65 ideal for outdoor areas

#### Guarantee

Warranty 7 years

## Features & benefits

- High efficacy of 91lm/W
- Single LED and lens combination for maximum efficiency and optimal light
- Choice of material finish to suit different
- Choose from a range of hoods for reduced



Sold Separately