



SP50

IP20 LED strip pack and driver

FEATURES

IP rating	IP20
CSP Switchable	Single CCT
Dimmable Option	Driver dependent
LED Lifetime	L70 30,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM5
Self-Adhesive Backing	True
Bespoke Lengths	No
Strip type	Flexible tape

INSTALLATION INFORMATION

Input	220-240V AC
Maximum Ambient Temperature	40°C
Weight	53g per meter
Construction Material	Flexible tape
UK Bathroom Zone	2
Electric Class (1, 2, 3)	III
Maximum Running Length	5 m

PHOTOMETRICS @ 25°C

Product code	Type	W	Colour	Beam	lm	lm/W	Lx @ 1m	Energy
SP5040	5m reel 60 LED's/m	4.8W/m	4000K	120°	490	102	161	
SP5030	5m reel 60 LED's/m	4.8W/m	3000K	120°	450	94	148	
SP5027	5m reel 60 LED's/m	4.8W/m	2700K	120°	430	90	141	

WIRING INFORMATION

Cable / Flying Lead	Supplied with a minimum of 200mm flying lead from one end
Type of Wiring Required	Parallel

LED DRIVER

Driver	Input	SELV	Dimming	Min	Max
PS3024B	220-240V	Yes	Yes (with PDCINT1-10V)	-	5m

ACCESSORIES

LED STRIP PROFILE RANGE	Profile range to house adhesive strip	Sold Separately
PDCINT1-10V	1-10V dimming interface for use with 24V LED drivers	Sold Separately

4.8W Ideal for accent lighting with 4.8W/m

IP20 Ideal for living room and hallways with IP20 rating

Quick and easy installation with 3M self-adhesive backing

WARRANTY

Warranty 3 years

FEATURES & BENEFITS


Driver included

Excellent for accent lighting

Cut points every 100mm

3M self-adhesive backing for secure and easy installation

Supplied in a resealable, antistatic bag to protect during transit

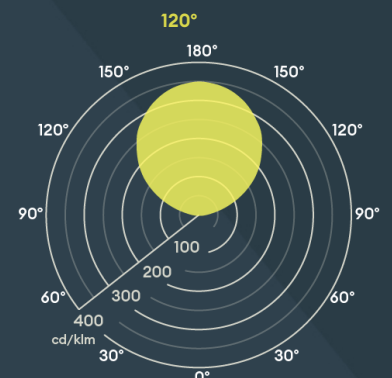

5m/100mm



8mm