



RGBW



Ideal for accent lighting with
4.8W/m



IP20 ideal for indoor
installations

SPRGBW

RGBW Strip Kit

FEATURES

IP rating	IP20
CSP Switchable	RGBW
Dimmable Option	Yes
LED Lifetime	L70 25,000h
Colour Rendering Index	CRI>80
Self-Adhesive Backing	Yes
Bespoke Lengths	No
Strip type	Flexible tape

INSTALLATION INFORMATION

Input	220-240V AC
Maximum Ambient Temperature	40°C
Weight	19g per meter
Insulation Coverable	No
Inrush Current	75A 0.1ms
Construction Material	Copper
UK Bathroom Zone	N/A
SELV	Yes
Electric Class (1, 2, 3)	3
Suitable for coastal areas	No
DIN Rail Mount	No
Install Connector Type	Flying lead
Connection Output	Terminals
Dimmer Type	Supplied Controller
Power Factor	0.9

WARRANTY

Warranty 3 years

FEATURES & BENEFITS

Driver included
5m reel
Remote control included

RGBW Photometrics

Product Code	Type	Wattage	Colour	Beam Angle	lm	lm/W	lx @ 1m
SPRGBW	5m reel	4.8W/m	White (4000K)	120°	373	78	124
SPRGBW	5m reel	4.8W/m	Red	120°	110	25	33
SPRGBW	5m reel	4.8W/m	Green	120°	296	62	89
SPRGBW	5m reel	4.8W/m	Blue	120°	79	18	24

WIRING INFORMATION


Cable / Flying Lead	Supplied with a minimum of 250mm fly lead with connector from one end
Type of Wiring Required	Parallel
Input Cable Type	0.5 -1.5mm Max

LED DRIVER

Driver	Input
PS7524	220-240V

ACCESSORIES

CR575RGBW	5-core PVC cable	Sold Separately
LED STRIP PROFILE RANGE	Profile range to house adhesive strip	Sold Separately
LED COVE PACK	Coving to house adhesive strip	Sold Separately
PDCINTI-10V	1-10V dimming interface for use with 24V LED drivers	Sold Separately

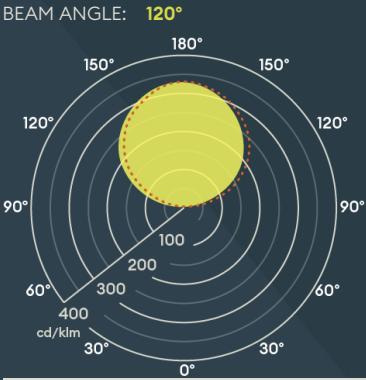

5m/100mm



12mm