



# SPRGBW

RGBW Strip Kit

## FEATURES

IP rating	IP20
CSP Switchable	RGBW
Tilttable (°)	Fixed
Dimmable Option	Yes
LED Lifetime	L70 25,000h
Colour Rendering Index	CRI>80
Self-Adhesive Backing	True
Bespoke Lengths	No
Strip type	Flexible tape

## INSTALLATION INFORMATION

Input	220-240V AC
Maximum Ambient Temperature	40°C
Weight	19g per meter
Insulation Coverable	No
Inrush Current	75A 0.11ms
Construction Material	Copper
UK Bathroom Zone	N/A
SELV	Yes
Electric Class (1, 2, 3)	III
Suitable for coastal areas	No
DIN Rail Mount	No
Install Connector Type	Flying lead
Connection Output	Terminals
Dimmer Type	Supplied Controller
Power Factor	0.9

## RGBW Photometrics

Product Code	Type	Wattage	Colour	Beam Angle	lm	lm/W	lx @ 1m
SPRGBW	5m reel	4.8W/m	White (4000K)	120°	373	78	124
SPRGBW	5m reel	4.8W/m	Red	120°	110	25	33
SPRGBW	5m reel	4.8W/m	Green	120°	296	62	89
SPRGBW	5m reel	4.8W/m	Blue	120°	79	18	24

## WIRING INFORMATION

Cable / Flying Lead	Supplied with a minimum of 250mm fly lead with connector from one end
Type of Wiring Required	Parallel
Input Cable Type	0.5 -1.5mm Max

## LED DRIVER

Driver	Input
PS7524	220-240V

## ACCESSORIES

CR575RGBW	5-core PVC cable	Sold Separately
LED STRIP PROFILE RANGE	Profile range to house adhesive strip	Sold Separately
LED COVE PACK	Coving to house adhesive strip	Sold Separately
PDCINTI-10V	1-10V dimming interface for use with 24V LED drivers	Sold Separately



RGBW



Ideal for accent lighting with  
4.8W/m




IP20 ideal for indoor  
installations

## WARRANTY

Warranty 3 years

## FEATURES & BENEFITS

Driver included
5m reel
Remote control included

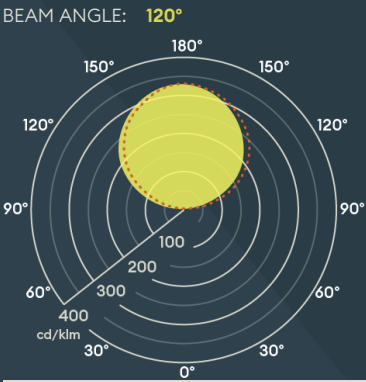

5m/100mm

