




*Bezels available in black, white and satin chrome

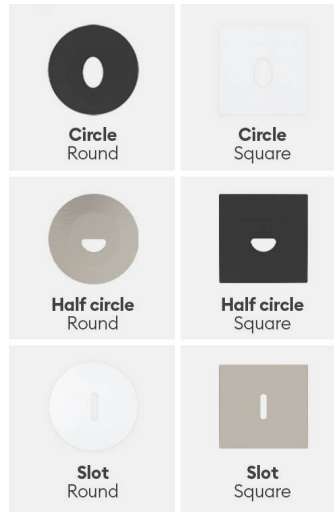

STEPBEAM

Asymmetrical Wall Light

FEATURES

IP rating	IP54
IK rating	IK04
CSP Switchable	Single CCT
Tiltable (°)	Fixed
Dimmable Option	Yes (Mains)
LED Lifetime	L70 50,000h
Colour Rendering Index	CRI>90
Colour Consistency	SDCM3
Emergency Option	No
Rotation angle (°)	Fixed

INSTALLATION INFORMATION

Input	220-240V AC
Maximum Ambient Temperature	-10°C - 40°C
Weight	25kg
Inrush Current	1.05A 0.05ms
Cut Out Size	45
Construction Material	Die-cast aluminum
UK Bathroom Zone	N/A
Electric Class (1, 2, 3)	I

PHOTOMETRICS @ 25°C

Product code	Finish	W	Colour	Beam	lm	lm/W	Energy
STEPBEAM30	Bezel sold separately	2.7W	3000K	30° to 45°	See Bezel Accessories	See Bezel Accessories	

Energy rating is a reflection of the LED light source.

WIRING INFORMATION

Cable / Flying Lead	170mm, 2x 0.75mm Live & Neutral
Type of Wiring Required	Parallel

ACCESSORIES

Stepbeam Bezels	Round or Square, Circle, Half circle or slot bezels	Sold Separately
-----------------	---	-----------------


COLLINGWOOD
LIGHTING

LIGHTING INNOVATION

2.7W 2.7W

 Quick and easy installation

IP54 IP54 rated for interior use

WARRANTY

Warranty 5 years

FEATURES & BENEFITS

Interchangeable faceplate with magnetic design

High quality powder coating finish from AkzoNobel

Colour choice of white, black or satin chrome

Shape choice of square or round

Compatible with leading and trailing edge phase cut dimmers

BEAM ANGLE: **30° to 45°**

