



LiFePO4 battery



Battery Temperature  
Monitored



DALI-2 Addressable, Manual  
& Self Test Option

## WARRANTY

Warranty	5 years
Battery Warranty	5 years

## FEATURES & BENEFITS

- Compliant with ISO 7010 & 3864
- Housing is rugged and made of polycarbonate
- Maintained and Non-Maintained options
- IP65 suitable for outdoor environments
- Has three M20 entry knock-outs (one on each side and one in the bottom), and rear BESA box fixing points
- Legend Kit included
- Ideal for open areas, escape routes, for general illumination or as an exit sign
- Self-test function can be easily disabled by removing green 2-pin jumper connector

# SALVUS BULKHEAD

150lm & 350lm Emergency Bulkhead

## FEATURES

IP rating	IP65
IK rating	IK10
CSP Switchable	Single CCT
LED Lifetime	L70 50,000h
Emergency Option	Yes, Manual & Self-Test
Maintained / Non-Maintained	Maintained, Non-Maintained

## INSTALLATION INFORMATION

Input	220-240V AC
Maximum Ambient Temperature	0°C-40°C
Weight	EMBWiMS:520g, EMBWiD:492g, EMBWiMS:610g, EMBWiD:528g
Inrush Current	4A 1ms
Construction Material	PC Housing
Electric Class (1, 2, 3)	I
Battery	EMBWiMS: LiFePO4 3.2V 1500mAh, EMBWiD: LiFePO4 3.2V 1500mAh, EMBWiMS: LiFePO4 3.2V 3000mAh, EMBWiD: LiFePO4 3.2V 3000mAh
Install Connector Type	Push-fit connector
UK Building Regulations	N/A
Mounting Options	Surface
Viewing distance	18

## PHOTOMETRICS @ 25°C


Product code	Finish	Type	W	Colour	Beam	lm	EM lm
EMBWiMS	White	Manual & Self Test	2.5W	6500K	100°	150	150
EMBWiMS	White	Manual & Self Test	3.5W	6500K	106°	350	350
EMBWiD	White	DALI-2	2.5W	6500K	100°	150	150
EMBWiD	White	DALI-2	3.5W	6500K	106°	350	350

## WIRING INFORMATION

Type of Wiring Required	Parallel
-------------------------	----------

## ACCESSORIES

EMBWRK	Salvus Bulkhead White, Recessing Kit	Sold Separately
EMBDD	Salvus Bulkhead, Double Sided Diffuser	Sold Separately

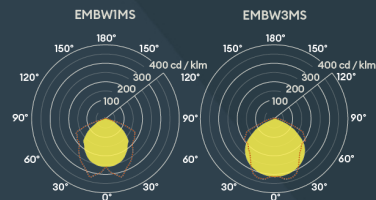

352mm

