

LiFePO4 battery



Battery Temperature
Monitored



DALI-2 Addressable, Manual
& Self Test Option

WARRANTY

Warranty	5 years
Battery Warranty	5 years

FEATURES & BENEFITS

- Compliant with ISO 7010 & 3864
- Housing is rugged and made of polycarbonate
- Maintained and Non-Maintained options
- IP65 suitable for outdoor environments
- Has three M20 entry knock-outs (one on each side and one in the bottom), and rear BESA box fixing points
- Legend Kit included
- Ideal for open areas, escape routes, for general illumination or as an exit sign
- Self-test function can be easily disabled by removing green 2-pin jumper connector

SALVUS BULKHEAD

150lm & 350lm Emergency Bulkhead

FEATURES

IP rating	IP65
IK rating	IK10
CSP Switchable	Single CCT
LED Lifetime	L70 50,000h
Emergency Option	Yes, Manual & Self-Test
Maintained / Non-Maintained	Maintained, Non-Maintained

INSTALLATION INFORMATION

Input	220-240V AC
Maximum Ambient Temperature	0°C-40°C
Weight	EMBW1MS:490g, EMBW1D:492g, EMBW3MS:526g, EMBW3D:528g
Inrush Current	EMBW1MS: 4A 62.5ms, EMBW1D: 4A 62.5ms, EMBW3MS: 4A 62.5ms, EMBW3D: 4A 62.5ms
Construction Material	PC Housing
Electric Class (1, 2, 3)	I
Battery	EMBW1MS: LiFePO4 3.2V 1500mAh, EMBW1D: LiFePO4 3.2V 1500mAh, EMBW3MS: LiFePO4 3.2V 3000mAh, EMBW3D: LiFePO4 3.2V 3000mAh
Install Connector Type	Push-fit connector
UK Building Regulations	N/A
Mounting Options	Surface
Viewing distance	18

PHOTOMETRICS @ 25°C


Product code	Finish	Type	W	Colour	Beam	lm	EM lm
EMBW1MS	White	Manual & Self Test	2.5W	6500K	100°	150	150
EMBW3MS	White	Manual & Self Test	3.5W	6500K	106°	350	350
EMBW1D	White	DALI-2	2.5W	6500K	100°	150	150
EMBW3D	White	DALI-2	3.5W	6500K	106°	350	350

WIRING INFORMATION

Type of Wiring Required	Parallel
-------------------------	----------

ACCESSORIES

EMBW1RK	Salvus Bulkhead White, Recessing Kit	Sold Separately
EMBD0	Salvus Bulkhead, Double Sided Diffuser	Sold Separately

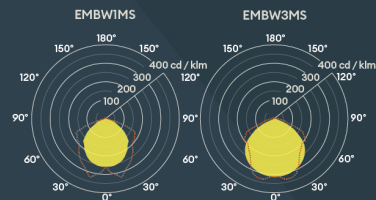

352mm

