



collingwood




RGBW



IP67 for complete protection against ingress of dust & water



IK10 for protection against high impact

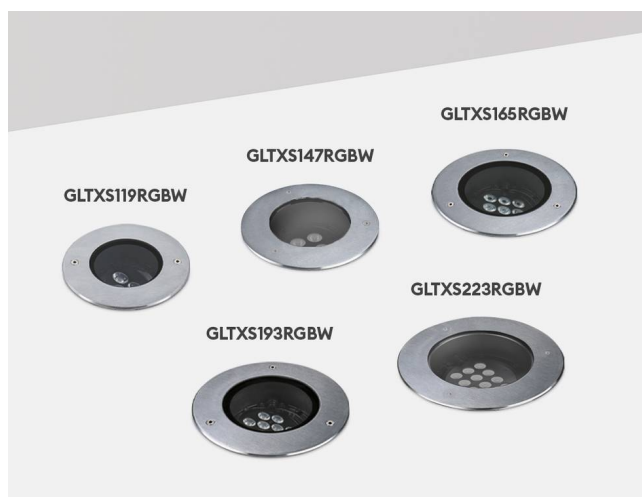

Tilt RGBW ground light

Features

| | |
|------------------------|----------------------------|
| IP rating | IP67 |
| IK rating | IK10 |
| CSP Switchable | RGBW |
| Tilttable | 25° |
| LED Lifetime | L70 50,000h |
| Colour Rendering Index | CRI>80 |
| Colour Consistency | SDCM3 |
| Walk Over / Drive Over | Drive over (15mph maximum) |
| Rotation Angle | No |

Installation Information

| | |
|-----------------------------|---|
| Input | 220-240V AC |
| Maximum Ambient Temperature | -25°C - 40°C |
| Weight | GLTM_11: 0.99kg, GLTM_14: 1.56kg, GLTM_16: 2.03kg, GLTM_19: 3.26kg, GLTM_22: 3.98kg |
| Cut Out Size | 119 |
| Construction Material | Anodised aluminium body, 316 SS bezel |
| UK Bathroom Zone | 2 |
| SELV | N/A |
| Electric Class (1, 2, 3) | 3 |
| Suitable for coastal areas | Yes |

Guarantee

Warranty 5 years

Features & benefits

- Suitable for coastal applications
- Tilt angle of luminaire is adjustable, just turn knob to tilt the light distribution up to 25 degrees
- Static loading capacity is 2000kg
- Pre-wired with 1 meter of cable to aid the installer
- TRIAC mains dimmable and DALI-2 dimmable options also available
- Supplied with installation tube

Wiring Information

| | |
|-------------------------|----------------------------------|
| Cable / Flying Lead | Pre-wired 1.0M H05RN-F, 5x1.0mm2 |
| Type of Wiring Required | Series |

LED Driver

| Driver | Input | SELV | Dimming | Bathroom Zone | Max |
|-------------|----------|------|------------|---------------|-----|
| CCDRV75DALI | 220-240V | Yes | Yes (Dali) | 2 | 4 |
| CCDRV75DMX | 220-240V | Yes | Yes | 2 | 4 |
| CCDRV75RF | 220-240V | Yes | Yes | 2 | 4 |

Accessories

| | | |
|------------|------------------|-----------------|
| JB3 or JB7 | Junction box | Sold Separately |
| CR575RGBW | 5-core PVC cable | Sold Separately |

