

UL010

Universal LED light

FEATURES

IP rating	IP68
CSP Switchable	Single CCT
Tiltable	360°
Dimmable Option	Driver dependent
LED Lifetime	L70 70,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM3
Rotation Angle	360°

INSTALLATION INFORMATION

Input	150mA / 250mA / 350mA / 500mA / 700mA
Maximum Ambient Temperature	55°C
Weight	UL010A: 512g, UL010BK: 512g, UL010SS: 500g, UL010BZ: TBC
Inrush Current	N/A
Construction Material	Stainless Steel 316
UK Bathroom Zone	0
SELV	N/A
Electric Class (1, 2, 3)	3
Earth Leakage	N/A
Suitable for coastal areas	Yes

PHOTOMETRICS @ 25°C

Product code	Finish	W	Colour	Beam	lm	lm/W	Energy
UL010SS22XF	Stainless steel	0.4W / 0.7W / 1W / 1.5W / 2.2W	2200K	40°	51 - 196	89 - 120	
UL010SS27XF	Stainless steel	0.4W / 0.7W / 1W / 1.5W / 2.2W	2700K	40°	51 - 196	89 - 120	
UL010SS30XF	Stainless steel	0.4W / 0.7W / 1W / 1.5W / 2.2W	3000K	40°	54 - 210	95 - 129	
UL010SS40XF	Stainless steel	0.4W / 0.7W / 1W / 1.5W / 2.2W	4000K	40°	60 - 234	106 - 143	
UL010AB22XF	Antique brass	0.4W / 0.7W / 1W / 1.5W / 2.2W	2200K	40°	51 - 196	89 - 120	
UL010AB27XF	Antique brass	0.4W / 0.7W / 1W / 1.5W / 2.2W	2700K	40°	51 - 196	89 - 120	
UL010AB30XF	Antique brass	0.4W / 0.7W / 1W / 1.5W / 2.2W	3000K	40°	54 - 210	95 - 129	
UL010AB40XF	Antique brass	0.4W / 0.7W / 1W / 1.5W / 2.2W	4000K	40°	60 - 234	106 - 143	
UL010BK22XF	Black	0.4W / 0.7W / 1W / 1.5W / 2.2W	2200K	40°	51 - 196	89 - 120	
UL010BK27XF	Black	0.4W / 0.7W / 1W / 1.5W / 2.2W	2700K	40°	51 - 196	89 - 120	

Energy rating is a reflection of the LED light source.



Switchable driver option for quick and easy installation



Coastal Protected



IP68 ideal for outdoor areas and under water lighting

WARRANTY

Warranty

7 years

FEATURES & BENEFITS

Complete with wall fixings



Robust cable for use outdoors

Tilt & rotate for adjusting light

Available in an array of colours

Long lifetime of 70,000hrs

BEAM ANGLE: 40°

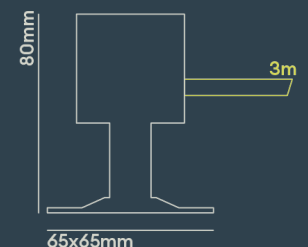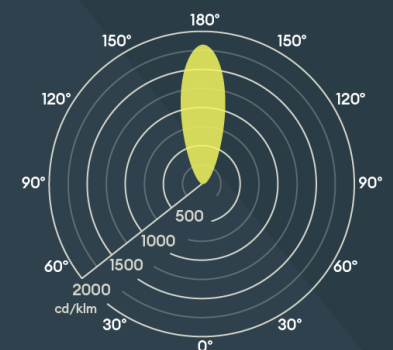

Cable / Flying Lead	3m (H05RN-F) rubberised cable (outside diameter: 6mm)
Type of Wiring Required	Series

LED DRIVER

Driver	Input	SELV	Dimming	Bathroom Zone
DRV150700 (all settings)	220-240V	Yes	No	N/A
DRV350700TD (350 & 500mA)	220-240V	Yes	Yes	N/A
DRV350700TD (700mA)	220-240V	Yes	Yes	N/A

ACCESSORIES

JB2 / JB4	Waterproof junction box / Gel filled waterproof connector	Sold Separately
WCR 275 BLACK	2-core rubber cable	Sold Separately



COLLINGWOOD
LIGHTING

LIGHTING INNOVATION

UL010 Modular is a versatile, swivel-mounted universal light that offers endless possibilities and ensures that any corner of a landscape can be lit, whether that's a pond, tree, or anything in-between. With a 360° stainless-steel bracket, 12° or 40° beam angle, IP68 water-resistance rating, and coastal protection, this feature light is a perfect addition. Available in new colours featuring stainless steel, bronze, black, and antique brass.