




collingwood



UL010

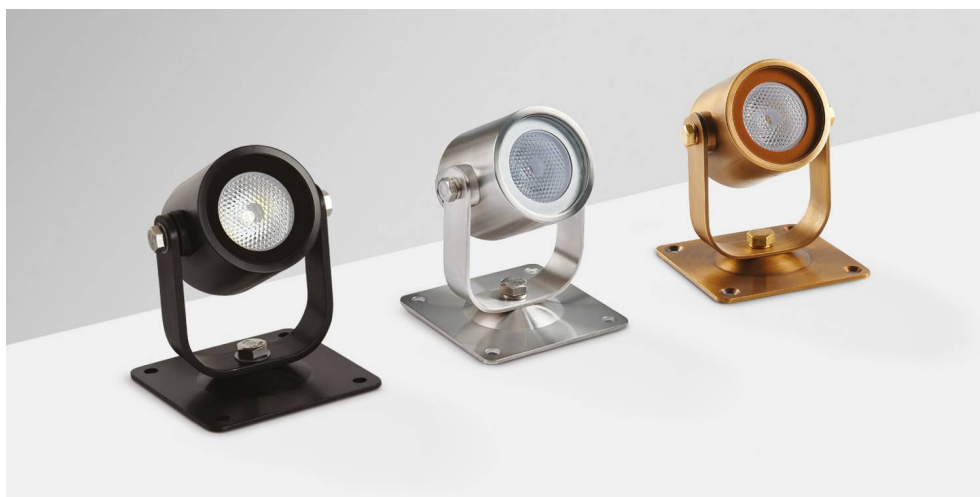

3W at 700mA



Coastal protected



IP68 ideal for outdoor areas and under water lighting

Features

IP rating	IP68
CSP Switchable	Single CCT
Tiltable	360°
Dimmable Option	Driver dependent
LED Lifetime	L70 70,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM3
Rotation Angle	360°

Installation Information

Input	700mA
Maximum Ambient Temperature	35°C
Weight	500g
Inrush Current	N/A
Construction Material	Stainless steel (316), brass, anodised aluminium
UK Bathroom Zone	0
Electric Class (1, 2, 3)	3
Earth Leakage	N/A
Suitable for coastal areas	Yes

Guarantee

Warranty 7 years

Features & benefits

- Complete with wall fixings
- Robust cable for use outdoors
- Tilt & rotate for adjusting light
- Long lifetime of 70,000hrs

Photometrics @ 25°C

Product Code	Finish	Beam	W	Colour	lm	lm/W	lx@1m	Energy
UL010 NW	Stainless steel 316	Spot: 26°, Flood: 40°	3W	4000K	119	40	648	
UL010 WW	Stainless steel 316	Spot: 26°, Flood: 40°	3W	3000K	95	32	411	
UL010 27	Stainless steel 316	26°	3W	2700K	92	31	399	
UL010 A WW	Brass	26°	3W	3000K	95	32	411	
UL010 A 27	Brass	26°	3W	2700K	92	31	399	
UL010 B 30	Black anodised aluminium	26°	3W	3000K	95	32	411	
UL010 B 27	Black anodised aluminium	26°	3W	2700K	92	31	399	

Energy rating is a reflection of the LED light source.

Wiring Information

Cable / Flying Lead	3m (H05RN-F) rubberised cable (outside diameter: 6mm)
Type of Wiring Required	Series
Input Cable Type	(H05RN-F) rubberised cable (outside diameter: 6mm)

LED Driver

Driver	Input	SELV	Dimming	Bathroom Zone	Min	Max
PLU/700 3-9	220-240V	Yes	No	0	3	9
PSIP70018W	220-240V	Yes	No	0	1	8
PSDIM700	220-240V		Yes (1-10V)	0	1	18

Accessories

JB2 / JB4	Waterproof junction box / Gel filled waterproof connector	Sold Separately
PDC/GRID DIMMER	Grid dimmer kit for multiple fitting types	Sold Separately
WCR 275 BLACK	2-core rubber cable	Sold Separately

