



Switchable driver option for quick and easy installation



Coastal Protected



IP68 ideal for outdoor areas and under water lighting

WARRANTY

Warranty

7 years

FEATURES & BENEFITS

Complete with wall fixings

Robust cable for use outdoors

Tilt & rotate for adjusting light

Available in an array of colours

Long lifetime of 70,000hrs



Stainless Steel



Antique Brass



Black



Bronze

UL010

Universal LED light

FEATURES

IP rating	IP68
CSP Switchable	Single CCT
Tilttable (°)	360
Dimmable Option	Driver dependent
LED Lifetime	L70 70,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM3
Rotation angle (°)	360



INSTALLATION INFORMATION

Input	150mA / 250mA / 350mA / 500mA / 700mA DC
Maximum Ambient Temperature	55°C
Weight	UL010A: 562g, UL010BK: 332g, UL010SS: 500g, UL010BZ: TBC
Inrush Current	N/A
Construction Material	Antique Brass
UK Bathroom Zone	0
SELV	N/A
Electric Class (1, 2, 3)	III
Earth Leakage	N/A
Suitable for coastal areas	Yes

PHOTOMETRICS @ 25°C

Product code	Finish	W	Colour	Beam	lm	lm/W	Energy
UL010SS22XF	Stainless steel	0.4W / 0.7W / 1W / 1.5W / 2.2W	2200K	40°	51 - 196	89 - 120	A f G D
UL010SS27XF	Stainless steel	0.4W / 0.7W / 1W / 1.5W / 2.2W	2700K	40°	51 - 196	89 - 120	A f G D
UL010SS30XF	Stainless steel	0.4W / 0.7W / 1W / 1.5W / 2.2W	3000K	40°	54 - 210	95 - 129	A f G D
UL010SS40XF	Stainless steel	0.4W / 0.7W / 1W / 1.5W / 2.2W	4000K	40°	60 - 234	106 - 143	A f G D
UL010AB22XF	Antique brass	0.4W / 0.7W / 1W / 1.5W / 2.2W	2200K	40°	51 - 196	89 - 120	A f G D
UL010AB27XF	Antique brass	0.4W / 0.7W / 1W / 1.5W / 2.2W	2700K	40°	51 - 196	89 - 120	A f G D
UL010AB30XF	Antique brass	0.4W / 0.7W / 1W / 1.5W / 2.2W	3000K	40°	54 - 210	95 - 129	A f G D
UL010AB40XF	Antique brass	0.4W / 0.7W / 1W / 1.5W / 2.2W	4000K	40°	60 - 234	106 - 143	A f G D
UL010BK22XF	Black	0.4W / 0.7W / 1W / 1.5W / 2.2W	2200K	40°	51 - 196	89 - 120	A f G D
UL010BK27XF	Black	0.4W / 0.7W / 1W / 1.5W / 2.2W	2700K	40°	51 - 196	89 - 120	A f G D

BEAM ANGLE: 40°

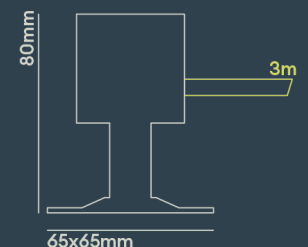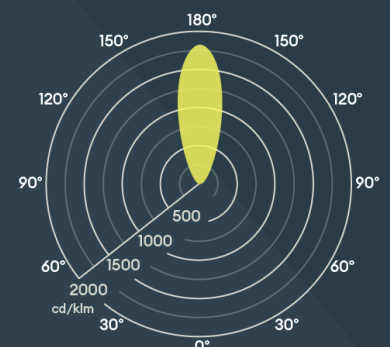

Energy rating is a reflection of the LED light source.



WIRING INFORMATION

Cable / Flying Lead	3m (H05RN-F) rubberised cable (outside diameter: 6mm)
Type of Wiring Required	Series

LED DRIVER

Driver	Input	SELV	Dimming	Bathroom Zone
DRV150700 (all settings)	220-240V	Yes	No	N/A
DRV350700TD (350 & 500mA)	220-240V	Yes	Yes	N/A
DRV350700TD (700mA)	220-240V	Yes	Yes	N/A

ACCESSORIES

JB2 / JB4	Waterproof junction box / Gel filled waterproof connector	Sold Separately
WCR 275 BLACK	2-core rubber cable	Sold Separately

UL010 Modular is a versatile, swivel-mounted universal light that offers endless possibilities and ensures that any corner of a landscape can be lit, whether that's a pond, tree, or anything in-between. With a 360° stainless-steel bracket, 12° or 40° beam angle, IP68 water-resistance rating, and coastal protection, this feature light is a perfect addition. Available in new colours featuring stainless steel, bronze, black, and antique brass.