



Switchable driver option for quick and easy installation



Coastal Protected



IP68 ideal for outdoor areas and under water lighting

## WARRANTY

Warranty

7 years

## FEATURES & BENEFITS

Single LED and lens combination for maximum efficiency and optimal light distribution

Complete with wall fixings

Tilt & rotate for adjusting light

Available in an array of colours

Long lifetime of 70,000hrs



Stainless Steel



Antique Brass



Black



Bronze

# UL030

High output universal LED light

## FEATURES



IP rating	IP68
CSP Switchable	Single CCT
Tilttable (°)	360
Dimmable Option	Driver dependent
LED Lifetime	L70 70,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM3
Rotation angle (°)	360

## INSTALLATION INFORMATION

Input	150mA / 250mA / 350mA / 500mA / 700mA DC
Maximum Ambient Temperature	55°C
Weight	UL030AB: 680g, UL030BK: 680g, UL030SS: 645g, UL030BZ: TBC
Inrush Current	N/A
Construction Material	Stainless Steel 316
UK Bathroom Zone	0
SELV	N/A
Electric Class (1, 2, 3)	III
Earth Leakage	N/A
Suitable for coastal areas	Yes

## PHOTOMETRICS @ 25°C

Product code	Finish	W	Colour	Beam	lm	lm/W	Energy
UL030SS22XS	Stainless steel	0.85W / 1.4W / 2W / 3W / 4.6W	2200K	12°	108 - 431	94 - 135	A t G E
UL030SS27XS	Stainless steel	0.85W / 1.4W / 2W / 3W / 4.6W	2700K	12°	129 - 515	112 - 161	A t G E
UL030SS30XS	Stainless steel	0.85W / 1.4W / 2W / 3W / 4.6W	3000K	12°	130 - 520	113 - 163	A t G E
UL030SS40XS	Stainless steel	0.85W / 1.4W / 2W / 3W / 4.6W	4000K	12°	134 - 538	96 - 168	A t G E
UL030SS22XF	Stainless steel	0.85W / 1.4W / 2W / 3W / 4.6W	2200K	40°	108 - 431	94 - 135	A t G E
UL030SS27XF	Stainless steel	0.85W / 1.4W / 2W / 3W / 4.6W	2700K	40°	129 - 515	112 - 161	A t G E
UL030SS30XF	Stainless steel	0.85W / 1.4W / 2W / 3W / 4.6W	3000K	40°	130 - 520	113 - 163	A t G E
UL030SS40XF	Stainless steel	0.85W / 1.4W / 2W / 3W / 4.6W	4000K	40°	134 - 538	96 - 168	A t G E
UL030AB22XS	Antique brass	0.85W / 1.4W / 2W / 3W / 4.6W	2200K	12°	108 - 431	94 - 135	A t G E
UL030AB27XS	Antique brass	0.85W / 1.4W / 2W / 3W / 4.6W	2700K	12°	129 - 515	112 - 161	A t G E

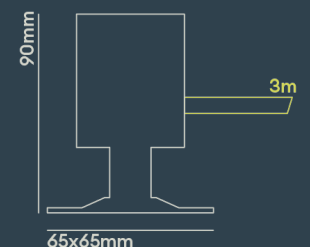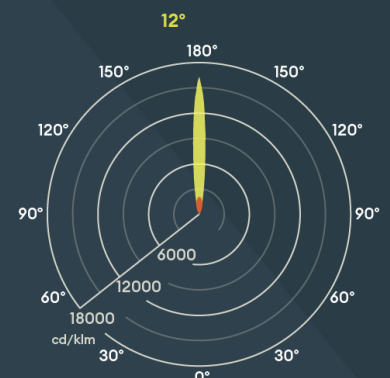

Energy rating is a reflection of the LED light source.



## WIRING INFORMATION

<b>Cable / Flying Lead</b>	1m (H05RN-F) rubberised cable (outside diameter: 6mm)
<b>Type of Wiring Required</b>	Series

## LED DRIVER

Driver	Input	SELV	Dimming	Bathroom Zone
DRV150700 (all settings)	220-240V	Yes	No	N/A
DRV350700TD (350 & 500mA)	220-240V	Yes	Yes	N/A
DRV350700TD (700mA)	220-240V	Yes	Yes	N/A

## ACCESSORIES

<b>JB2 / JB4</b>	Waterproof junction box / Gel filled waterproof connector	Sold Separately
<b>WCR 275 BLACK</b>	2-core rubber cable	Sold Separately

UL030 Modular is a versatile, swivel-mounted universal light that offers endless possibilities and ensures that any corner of a landscape can be lit, whether that's a pond, tree, or anything in-between. With a 360° stainless-steel bracket, 12° or 40° beam angle, IP68 water-resistance rating, and coastal protection, this feature light is a perfect addition. Available in new colours featuring stainless steel, bronze, black, and antique brass.