



Slim depth of just 38mm



UGR19 for low glare



75% down / 25% up ratio
uses light efficiently

VERSA TILE BLACK 1500MM

UGR19 architectural linear

FEATURES

IP rating	IP20
IK rating	IK02
CSP Switchable	Single CCT
UGR	UGR19
Sensor Option	PIR & Daylight with accessories
Dimmable Option	Yes (DALI-2, PUSH-DIM)
LED Lifetime	L80 54,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM6
Emergency Option	Yes, Self-Test

INSTALLATION INFORMATION

Input	220-240V AC
Maximum Ambient Temperature	0°C - 40°C
Weight	3.4kg
Inrush Current	Standard: 16A 672ms, DALI: 30A 45ms
Construction Material	Aluminium Housing, Polystyrene Diffuser
Electric Class (1, 2, 3)	I
Install Connector Type	Push-fit terminal, loop-in/loop-out
Mounting Options	Ceiling, wall & suspended
Power Factor	0.95

WARRANTY

Warranty	7 years
Battery Warranty	5 years

FEATURES & BENEFITS

Energy efficient up to 100lm/W

Choice of White (RAL9003), Black (RAL9005) or Silver (RAL9006)

Suspend as an individual luminaire or (by custom request) connect together to make a continuous run

>10% uplight when surface mounted

Configurable using our unique VERSABOX design to realise a range of lumen output, driver and sensor options

DALI-2 driver is switchable to enable lower lumen outputs


Supplied with suspension kit

DALI Dimmable Fitting with on-off PIR Sense

PHOTOMETRICS @ 25°C

Product code	Finish	Type	W	Colour	Beam	lm	lm/W	EM lm	Energy
VTBIN	Black RAL9005	Standard	45W	4000K	80	4500	100	-	
VTBINEM	Black RAL9005	Emergency	45W	4000K	80	4500	100	215	
VTBINP	Black RAL9005	PIR sensor	45W	4000K	80	4500	100	-	
VTBID	Black RAL9005	DALI-2 dimmable	45W	4000K	80	4500	100	-	
VTBIDP	Black RAL9005	DALI-2 Dimmable with On-Off PIR Sensor	45W	4000K	80	4500	100	-	
VTBIDEM	Black RAL9005	Emergency DALI-2 dimmable	45W	4000K	80	4500	100	215	
VTBIDPEM	Black RAL9005	Emergency DALI-2 Dimmable with On-Off PIR Sensor	45W	4000K	80	4500	100	215	
VTBINPEM	Black RAL9005	Emergency	45W	4000K	80	4500	100	215	

Energy rating is a reflection of the LED light source.

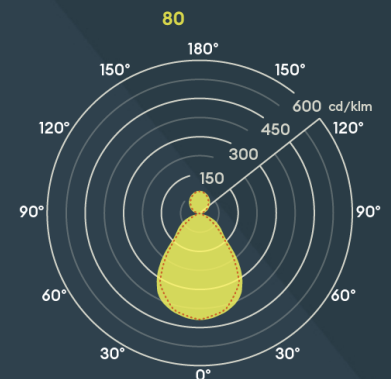

WIRING INFORMATION

Cable / Flying Lead	0.75-2.5mm ²
Type of Wiring Required	Parallel

ACCESSORIES

VTBWALL	Black Wall Mount Kit	Sold Separately
VTBCON	Black Connect Joint Kit	Sold Separately

1558mm



38mm

