



Slim depth of just 38mm



UGR19 for low glare



75% down / 25% up ratio  
uses light efficiently

## VERSA TILE SILVER 1500MM

UGR19 architectural linear

### FEATURES

<b>IP rating</b>	IP20
<b>IK rating</b>	IK02
<b>CSP Switchable</b>	Single CCT
<b>UGR</b>	UGR19
<b>Sensor Option</b>	PIR & Daylight with accessories
<b>Dimmable Option</b>	Yes (DALI-2, PUSH-DIM)
<b>LED Lifetime</b>	L80 54,000h
<b>Colour Rendering Index</b>	CRI>80
<b>Colour Consistency</b>	SDCM6
<b>Emergency Option</b>	Yes, Self-Test

### INSTALLATION INFORMATION

<b>Input</b>	220-240V AC
<b>Maximum Ambient Temperature</b>	0°C - 40°C
<b>Weight</b>	3.4kg
<b>Inrush Current</b>	Standard: 16A 672ms, DALI: 30A 45ms
<b>Construction Material</b>	Aluminium Housing, Polystyrene Diffuser
<b>Electric Class (1, 2, 3)</b>	I
<b>Install Connector Type</b>	Push-fit terminal, loop-in/loop-out
<b>Mounting Options</b>	Ceiling, wall & suspended
<b>Power Factor</b>	0.95

### WARRANTY

Warranty	7 years
Battery Warranty	5 years

### FEATURES & BENEFITS

Energy efficient up to 110lm/W

Choice of White (RAL9003), Black (RAL9005) or Silver (RAL9006)

Suspend as an individual luminaire or (by custom request) connect together to make a continuous run

>10% uplight when surface mounted

Configurable using our unique VERSABOX design to realise a range of lumen output, driver and sensor options

DALI-2 driver is switchable to enable lower lumen outputs

Supplied with suspension kit

DALI Dimmable Fitting with on-off PIR Sense

### PHOTOMETRICS @ 25°C

Product code	Finish	Type	W	Colour	Beam	lm	lm/W	EM lm	Energy
VTSIN	Silver	Standard	45W	4000K	80	5000	110	-	
VTSINEM	Silver	Emergency	45W	4000K	80	5000	110	240	
VTSIDEM	Silver	Emergency DALI-2 dimmable	45W	4000K	80	5000	110	240	
VTSIDP	Silver	DALI-2 Dimmable with On-Off PIR Sensor	45W	4000K	80	5000	110	-	
VTSIDPEM	Silver	Emergency DALI-2 Dimmable with On-Off PIR Sensor	45W	4000K	80	5000	110	240	
VTSID	Silver	DALI-2 dimmable	45W	4000K	80	5000	110	-	
VTSINP	Silver	PIR sensor	45W	4000K	80	5000	110	-	
VTSINPEM	Silver	Emergency	45W	4000K	80	5000	110	240	


Energy rating is a reflection of the LED light source.

### WIRING INFORMATION

<b>Cable / Flying Lead</b>	0.75-2.5mm <sup>2</sup>
<b>Type of Wiring Required</b>	Parallel

### ACCESSORIES

<b>VTSWALL</b>	Silver Wall Mount Kit	Sold Separately
<b>VTSICON</b>	Silver Connect Joint Kit	Sold Separately

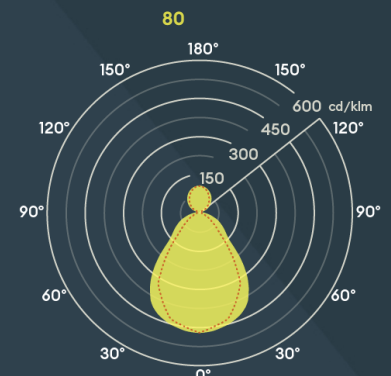

1558mm



38mm

