


6.5W 6.5W

 Integral bracket for easy installation

IP65 IP65 ideal for outdoor environments

WARRANTY

Warranty 5 years

FEATURES & BENEFITS

Ideal for framing doorways and entrances

Straight to mains screw terminals

Durable powder coated aluminium in contemporary black or grey finish

Up & down light for creating a feature of perimeters and entrances

Sleek curved design



WL013

IP65, 390lm up-down wall light



FEATURES

IP rating	IP65
IK rating	IK04
CSP Switchable	Single CCT
Tiltable (°)	Fixed
Dimmable Option	No
LED Lifetime	L70 30,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM6

INSTALLATION INFORMATION

Input	220-240V AC
Maximum Ambient Temperature	40°C
Weight	467g
Inrush Current	20A 0.5ms
Construction Material	Powder coated aluminium
UK Bathroom Zone	N/A
SELV	Yes
Electric Class (1, 2, 3)	I
Earth Leakage	0.1
Suitable for coastal areas	No
Mounting Options	Wall

PHOTOMETRICS @ 25°C

Product code	Finish	W	Colour	Beam	lm	lm/W	Lx @ 1m	Energy
WL013X30	Black RAL9011	6.5W	3000K	107°/91°	390	60	99	
WL013G30	Grey RAL7022	6.5W	3000K	107°/91°	390	60	99	

WIRING INFORMATION


Cable / Flying Lead	N/A
Type of Wiring Required	Parallel

LED DRIVER

Input	SELV	Dimming	Bathroom Zone	Min	Max
-	Yes	No	-	-	-

ACCESSORIES

N/A	No accessories required
-----	-------------------------

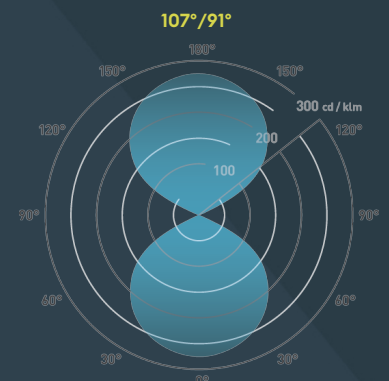

90mm 51.5mm
36.5mm

