

**2.6W** 2.6W

 Coastal protected

 Main voltage step light

## WARRANTY

Warranty 7 years

## FEATURES & BENEFITS

Recessed, asymmetric wall or ground light perfect for illuminating walls, steps and pathways

Available in rustic cast stainless steel and sleek brushed stainless steel finishes

Installation tube included



## WL339

Asymmetric, straight to mains, cast finish step light


### FEATURES

|                        |             |
|------------------------|-------------|
| IP rating              | IP65        |
| IK rating              | Other       |
| CSP Switchable         | Single CCT  |
| LED Lifetime           | L70 70,000h |
| Colour Rendering Index | CRI>80      |
| Colour Consistency     | SDCM3       |
| Walk Over / Drive Over | Walk over   |

### INSTALLATION INFORMATION

|                             |                       |
|-----------------------------|-----------------------|
| Input                       | 220-240V AC           |
| Maximum Ambient Temperature | 35°C                  |
| Weight                      | 1000g                 |
| Inrush Current              | 9A 0.8ms              |
| Cut Out Size                | 80                    |
| Construction Material       | Stainless steel (316) |
| UK Bathroom Zone            | 2                     |
| SELV                        | Yes                   |
| Electric Class (1, 2, 3)    | I                     |
| Earth Leakage               | 0.1                   |
| Suitable for coastal areas  | Yes                   |

### PHOTOMETRICS @ 25°C

| Product code | Finish          | W    | Colour | Beam | lm | lm/W | Lx @ 1m | Energy  |
|--------------|-----------------|------|--------|------|----|------|---------|---|
| WL339WW      | Stainless steel | 2.6W | 3000K  | 50°  | 50 | 19   | 54      |  |

### WIRING INFORMATION


|                         |   |
|-------------------------|---|
| Cable / Flying Lead     | 1m (H05RN-F) rubberised cable (outside diameter: 7mm) |
| Type of Wiring Required | Parallel  |
| Input Cable Type        | (H05RN-F) rubberised (OD: 7mm)                        |

### LED DRIVER

| Driver                       | Input    | SELV | Dimming | Bathroom Zone |
|------------------------------|----------|------|---------|---------------|
| N/A (integrated SELV driver) | 220-240V | Yes  | No      | 2             |

### ACCESSORIES

|                   |                                 |                 |
|-------------------|---------------------------------|-----------------|
| Installation Tube | For easy ground installation    | Included        |
| JB5               | Gel filled waterproof connector | Sold Separately |
| WC 5-9            | Quick release waterproof joint  | Sold Separately |

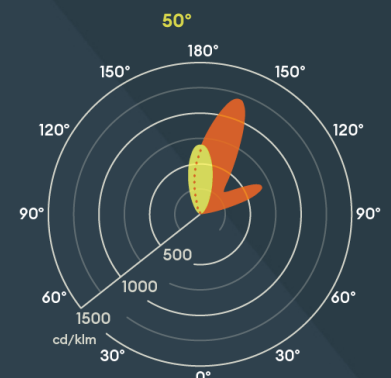

Ø98mm

