

**2.6W** 2.6W

 Coastal protected

 Main voltage step light

## WARRANTY

Warranty 7 years

## FEATURES & BENEFITS

Can be used as a wall light or ground light

Installation tube included

1m H05RN-F rubber cable attached for permanent use outdoors



## WL342

Asymmetric, straight to mains, brush finish step light






### FEATURES

IP rating	IP65
IK rating	Other
CSP Switchable	Single CCT
LED Lifetime	L70 70,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM3
Walk Over / Drive Over	Walk over

### INSTALLATION INFORMATION

Input	220-240V AC
Maximum Ambient Temperature	35°C
Weight	1.2Kg
Inrush Current	9A 0.8ms
Cut Out Size	80
Construction Material	Stainless steel (316) antique brass
UK Bathroom Zone	2
SELV	Yes
Electric Class (1, 2, 3)	I
Earth Leakage	0.1
Suitable for coastal areas	Yes

### PHOTOMETRICS @ 25°C

Product code	Finish	Type	W	Colour	Beam	lm	lm/W	Lx @ 1m	Energy
WL342NW	Stainless steel	Brushed Steel	2.6W	4000K	50°	59	22	65	
WL342WW	Stainless steel	Brushed Steel	2.6W	3000K	50°	50	19	54	
WL34227	Stainless steel	Brushed Steel	2.6W	2700K	50°	49	19	52	
WL342AB27	Antique brass	Antique Brass	2.6W	2700K	50°	49	19	52	
WL342AB30	Antique brass	Antique Brass	2.6W	3000K	50°	50	19	54	

### WIRING INFORMATION


Cable / Flying Lead	1m (H05RN-F) rubberised cable (outside diameter: 7mm)
Type of Wiring Required	Parallel
Input Cable Type	(H05RN-F) rubberised (OD: 7mm)

### LED DRIVER

Driver	Input	SELV	Dimming	Bathroom Zone
N/A (integrated SELV driver)	220-240V	Yes	No	2

### ACCESSORIES

Installation Tube	For easy ground installation	Included
JB5	Gel filled waterproof connector	Sold Separately
WC 5-9	Quick release waterproof joint	Sold Separately

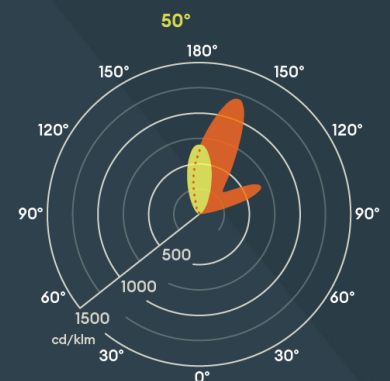

98x98mm

