



IP65 IP65 suitable for use outside

IK10 IK10

Wattage & CCT Switchable

CADDY

Colour & wattage switchable multi-purpose bulkhead

FEATURES


IP rating	IP65
IK rating	IK10
CSP Switchable	Switchable CCT
Sensor Option	Yes (on/off and Stepdim)
LED Lifetime	L80 50,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM6
Emergency Option	Yes, Manual & Self-Test

INSTALLATION INFORMATION

Input	220-240V AC
Maximum Ambient Temperature	-20°C-45°C
Weight	1kg
Inrush Current	14.9mA 252uS
Construction Material	PC
Electric Class (1, 2, 3)	II
Battery	LiFePO4 6.4V 1.5Ah Non-Maintained
UK Building Regulations	Part L
Mounting Options	Ceiling & wall
Power Factor	0.9

Photometrics @ 25°C

Product Code	Finish	Type	Beam	W	Colour	lm	lm/W	Energy
WL77WCC	White	On-Off	120°	9W	3000K	1125	125	
					4000K	1150	128	
					6500K	1150	128	
				12W	3000K	1525	127	
					4000K	1550	129	
					6500K	1550	129	
				16W	3000K	2040	128	
					4000K	2080	130	
					6500K	2080	130	
WL77WCCEM	White	Emergency	120°	9W	3000K	1125	125	
					4000K	1150	128	
					6500K	1150	128	
				12W	3000K	1525	127	
					4000K	1550	129	
					6500K	1550	129	
				16W	3000K	2040	128	
					4000K	2080	130	
					6500K	2080	130	

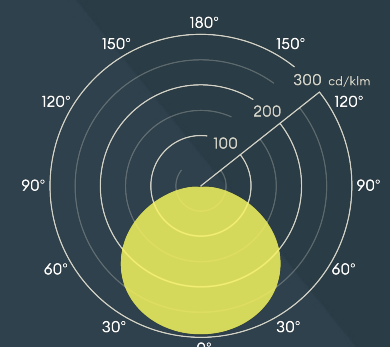

ACCESSORIES

WL77KITMS	Caddy Plug-in Kit, Microwave Sensor Master Slave	Sold Separately
WL77KITSD	Caddy Plug-in Kit, Microwave Sensor Step Dim	Sold Separately
WL77WE	Caddy White Eyelid	Sold Separately
ACREMOTEMWS	Optional Remote control for Step-Dim Sensor	Sold Separately

