



Black eyelid
WL95BE
300mm only



White eyelid
WL95BEW
300mm only

WL95 VERSA

CCT Colour & Wattage Switchable Bulkhead with plug-in Versabox accessories

FEATURES

IP rating	IP65
IK rating	IK09
CSP Switchable	Switchable CCT
Sensor Option	Microwave + Photocell options
Dimmable Option	Yes (DALI-2, PUSH-DIM)
LED Lifetime	L70 50,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM4
Emergency Option	Yes, Manual, Self and DALI-2 Test

INSTALLATION INFORMATION

Input	220-240V AC
Maximum Ambient Temperature	-20°C - 40°C
Weight	0.6 - 0.9kg
Inrush Current	8W: 14A 0.12ms, 20W: 25A 0.26ms
Construction Material	ABS Housing (RAL9003), Anti-UV Diffuser, 850°
UK Bathroom Zone	2
Electric Class (1, 2, 3)	II
Install Connector Type	Push-fit terminal, loop-in/loop-out
UK Building Regulations	Part L
Mounting Options	Ceiling & wall
Power Factor	0.9

Photometrics @ 25°C

Product Code	Finish	Type	Beam	W	Colour	lm	lm/W	Energy
WL95B3DCS	Black	300mm DALI-2	115°	10W	4000K	1500	150	A↑G C
					6000K	1500	150	
				15W	3000K	2100	140	
					4000K	2200	147	
					6000K	2200	147	
				20W	3000K	2800	140	
					4000K	3000	150	
					6000K	3000	150	
WL95W2NEMCS	White	250mm On-Off Manual Emergency	115°	5W	3000K	700	140	A↑G C
					4000K	750	150	
					6000K	750	150	
				6.5W	3000K	950	146	
					4000K	1000	154	
					6000K	1000	154	
				8W	3000K	1200	150	
					4000K	1250	156	
					6000K	1250	156	
WL95W3NEMCS	White	300mm On-Off Manual Emergency	115°	10W	3000K	1450	140	A↑G C
					4000K	1500	150	
					6000K	1500	150	
				15W	3000K	2100	140	
					4000K	2200	147	
					6000K	2200	147	
				20W	3000K	2800	140	
					4000K	3000	150	

COLLINGWOOD
LIGHTING

LIGHTING INNOVATION

CCT switchable between 3000K, 4000K & 6000K

Wattage switchable options from 5W to 20W

IK09 for impact protection


WARRANTY


Warranty	5 years
Battery Warranty	5 years
On-Site Warranty	2 years

FEATURES & BENEFITS

- IP65 suitable for use outside under a canopy
- Slim depth of just 80mm
- Ultra efficient up to 156 Llm/W for fast paybacks
- 4-way conduit entry points & BESA
- Detachable terminal block for convenient wiring
- Modular design for tool-less installation
- Versabox plug and play kit range to accommodate project requirements
- WLKITMWS microwave sensor is commissioned with a remote control to aid easy adjustment of settings once installation is complete. Use UNREMOTEMWS.

BEAM ANGLE: **115°**

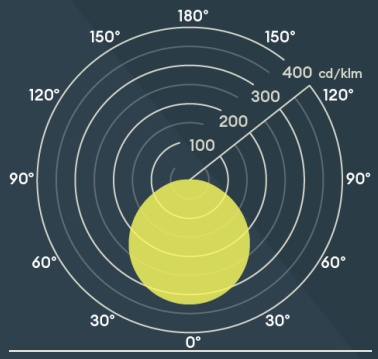



					6000K	3000	150	
WL95W2NMCS	White	250mm On-Off Microwave	115°	5W	3000K	700	140	A↑G C
					4000K	750	150	
					6000K	750	150	
				6.5W	3000K	950	146	
					4000K	1000	154	
					6000K	1000	154	
				8W	3000K	1200	150	
					4000K	1250	156	
					6000K	1250	156	
WL95W3NMCS	White	300mm On-Off Microwave	115°	10W	3000K	1450	140	A↑G C
					4000K	1500	150	
					6000K	1500	150	
				15W	3000K	2100	140	
					4000K	2200	147	
					6000K	2200	147	
				20W	3000K	2800	140	
					4000K	3000	150	
					6000K	3000	150	
WL95W2NMEMCS	White	250mm On-Off Microwave Manual Emergency	115°	5W	3000K	700	140	A↑G C
					4000K	750	150	
					6000K	750	150	
				6.5W	3000K	950	146	
					4000K	1000	154	
					6000K	1000	154	
				8W	3000K	1200	150	
					4000K	1250	156	
					6000K	1250	156	
WL95W3NMEMCS	White	300mm On-Off Microwave Manual Emergency	115°	10W	3000K	1450	140	A↑G C
					4000K	1500	150	
					6000K	1500	150	
				15W	3000K	2100	140	
					4000K	2200	147	
					6000K	2200	147	
				20W	3000K	2800	140	
					4000K	3000	150	
					6000K	3000	150	
WL95B2NEMCS	Black	250mm On-Off Manual Emergency	115°	5W	3000K	700	140	A↑G C
					4000K	750	150	
					6000K	750	150	
				6.5W	3000K	950	146	
					4000K	1000	154	
					6000K	1000	154	
				8W	3000K	1200	150	
					4000K	1250	156	
					6000K	1250	156	
WL95B3NEMCS	Black	300mm On-Off Manual Emergency	115°	10W	3000K	1450	140	A↑G C
					4000K	1500	150	
					6000K	1500	150	
				15W	3000K	2100	140	
					4000K	2200	147	
					6000K	2200	147	
				20W	3000K	2800	140	
					4000K	3000	150	

COLLINGWOOD
LIGHTING

LIGHTING INNOVATION

WL95 Versa is the ultimate bulkhead, with CCT adjustable from warm 3000K to bright 6000K and wattage options ranging from 5W to 20W, all packed in a slim, impact-resistant (IK09) and weatherproof (IP65) design. Plus with high efficiency of up to 154lm/W. This bulkhead offers easy installation with 4-way conduit entry, detachable terminal block, and tool-less modular design, and is compatible with Versabox plug-and-play kits for ultimate project customization.

Default Settings: 4000K colour temperature, 20W power consumption. *To order an On-Off Emergency variant, replace 'N' at the end of the part code with: 'NEM' for Manual-test, 'NE' for Self-Test, 'ED' for DALI-2 Test. To order a DALI-2 Emergency variant, replace 'D' at the end of the part code with: 'DED' for DALI-2 Test. Energy rating is a reflection of the LED light source.

8000K 3000 150

WIRING INFORMATION

Cable / Flying Lead	Push-fit terminals, 2.5mm² max, loop-in/loop-out.
Type of Wiring Required	Parallel

ACCESSORIES

WLKITMANEM	Manual Test Emergency plug-in Versabox, 250lm	Sold Separately
WLKITSELFEM	Self Test Emergency plug-in Versabox, 250lm	Sold Separately
WLKITPC	Photocell plug-in Versabox (must be used with UNREMOTEMWS)	Sold Separately
WLKITMWS	MIcrowave Sensor on/off plug-in Versabox (must be used with UNREMOTEMWS)	Sold Separately
UNREMOTEMWS	Remote control for use with microwave sensor	Sold Separately
WL95BEW	White Eyelid Accessory (300mm only)	Sold Separately
WL95BE	Black Eyelid Accessory (300mm only)	Sold Separately

COLLINGWOOD
LIGHTING

LIGHTING INNOVATION

WL95 Versa is the ultimate bulkhead, with CCT adjustable from warm 3000K to bright 6000K and wattage options ranging from 5W to 20W, all packed in a slim, impact-resistant (IK09) and weatherproof (IP65) design. Plus with high efficiency of up to 154lm/W. This bulkhead offers easy installation with 4-way conduit entry, detachable terminal block, and tool-less modular design, and is compatible with Versabox plug-and-play kits for ultimate project customization.