



CCT switchable between
3000K, 4000K & 6000K



Wattage switchable options
from 5W to 20W



IK09 for impact protection

WL95 VERSA

CCT Colour & Wattage Switchable Bulkhead with plug-in Versabox accessories

FEATURES

IP rating	IP65
IK rating	IK09
CSP Switchable	Switchable CCT
Sensor Option	Microwave + Photocell options
Dimmable Option	Yes (DALI-2, PUSH-DIM)
LED Lifetime	L70 50,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM4
Emergency Option	Yes, Manual, Self and DALI-2 Test

INSTALLATION INFORMATION

Input	220-240V AC
Maximum Ambient Temperature	-20°C - 40°C
Weight	0.6 - 0.9kg
Inrush Current	8W: 17A 0.42ms, 20W: 19A 0.46ms
Construction Material	ABS Housing (RAL9003), Anti-UV Diffuser, 850°
UK Bathroom Zone	2
Electric Class (1, 2, 3)	II
Install Connector Type	Push-fit terminal, loop-in/loop-out
UK Building Regulations	Part L
Mounting Options	Ceiling & wall
Power Factor	0.9

Photometrics @ 25°C

Product Code	Finish	Type	Beam	W	Colour	lm	lm/W	Energy
WL95W2NMEMCS	White	250mm On-Off Microwave Manual Emergency	115°	5W	4000K	750	150	
					6000K	750	150	
				6.5W	3000K	950	146	
					4000K	1000	154	
				8W	6000K	1000	154	
					3000K	1200	150	
WL95W3NMEMCS	White	300mm On-Off Microwave Manual Emergency	115°	10W	4000K	1250	156	
					6000K	1250	156	
				15W	3000K	1450	140	
					4000K	1500	150	
				20W	6000K	1500	150	
					3000K	2100	140	
				15W	4000K	2200	147	
					6000K	2200	147	
				20W	3000K	2800	140	
					4000K	3000	150	
WL95B2NEMCS	Black	250mm On-Off Manual Emergency	115°	5W	6000K	3000	150	
					3000K	700	140	
				6.5W	4000K	750	150	
					6000K	750	150	
				8W	3000K	950	146	
					4000K	1000	154	
				6.5W	6000K	1000	154	
					3000K	1200	150	
				8W	4000K	1250	156	
					6000K	1250	156	

WARRANTY

Warranty 5 years

Battery Warranty 5 years

On-Site Warranty 2 years

FEATURES & BENEFITS

IP65 suitable for use outside under a canopy

Slim depth of just 80mm

Ultra efficient up to 156 Lm/W for fast paybacks

4-way conduit entry points & BESA

Detachable terminal block for convenient wiring



Modular design for tool-less installation

Versabox plug and play kit range to accommodate project requirements

WLKITMWS microwave sensor is commissioned with a remote control to aid easy adjustment of settings once installation is complete. Use UNREMOEMWS.

UNREMOEMWS.

BEAM ANGLE: 115°

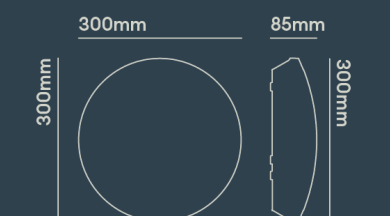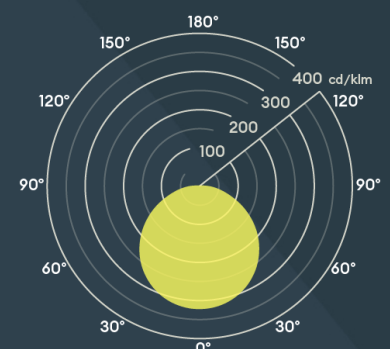

LIGHTING INNOVATION

WL95 Versa is the ultimate bulkhead, with CCT adjustable from warm 3000K to bright 6000K and wattage options ranging from 5W to 20W, all packed in a slim, impact-resistant (IK09) and weatherproof (IP65) design. Plus with high efficiency of up to 154lm/W. This bulkhead offers easy installation with 4-way conduit entry, detachable terminal block, and tool-less modular design, and is compatible with Versabox plug-and-play kits for ultimate project customization.

WL95B3NEMCS	Black	300mm On-Off Manual Emergency	115°	10W	6000K	1250	156	A1G C
					3000K	1450	140	
					4000K	1500	150	
				15W	6000K	1500	150	
					3000K	2100	140	
					4000K	2200	147	
				20W	6000K	2200	147	
					3000K	2800	140	
					4000K	3000	150	
					6000K	3000	150	
WL95B2NMCS	Black	250mm On-Off Microwave	115°	5W	3000K	700	140	A1G C
					4000K	750	150	
					6000K	750	150	
				6.5W	3000K	950	146	
					4000K	1000	154	
					6000K	1000	154	
				8W	3000K	1200	150	
					4000K	1250	156	
					6000K	1250	156	
					3000K	1450	140	
WL95B3NMCS	Black	300mm On-Off Microwave	115°	10W	3000K	1450	140	A1G C
					4000K	1500	150	
					6000K	1500	150	
				15W	3000K	2100	140	
					4000K	2200	147	
					6000K	2200	147	
				20W	3000K	2800	140	
					4000K	3000	150	
					6000K	3000	150	
					3000K	700	140	
WL95B2NMEMCS	Black	250mm On-Off Microwave Manual Emergency	115°	5W	4000K	750	150	A1G C
					6000K	750	150	
					3000K	950	146	
				6.5W	4000K	1000	154	
					6000K	1000	154	
					3000K	1200	150	
				8W	4000K	1250	156	
					6000K	1250	156	
					3000K	1450	140	
					4000K	1500	150	
WL95B3NMEMCS	Black	300mm On-Off Microwave Manual Emergency	115°	10W	6000K	1500	150	A1G C
					3000K	2100	140	
					4000K	2200	147	
				15W	6000K	2200	147	
					3000K	2800	140	
					4000K	3000	150	
				20W	6000K	3000	150	
					3000K	700	140	
					4000K	750	150	
					6000K	750	150	
WL95W2NECS	White	250mm On-Off Self Test Emergency	115°	5W	3000K	700	140	A1G C
					4000K	750	150	
					6000K	750	150	
				6.5W	3000K	950	146	
					4000K	1000	154	
					6000K	1000	154	
				8W	3000K	1200	150	
					4000K	1250	156	
					6000K	1250	156	
					3000K	1450	140	

Default Settings: 4000K colour temperature, 8W power consumption. Energy rating is a reflection of the LED light source.

4000K 1250 156

WIRING INFORMATION

Cable / Flying Lead	Push-fit terminals, 2.5mm ² max, loop-in/loop-out.
Type of Wiring Required	Parallel

ACCESSORIES

WLKITMANEM	Manual Test Emergency plug-in Versabox, 250lm	Sold Separately
WLKITSELFEM	Self Test Emergency plug-in Versabox, 250lm	Sold Separately
WLKITPC	Photocell plug-in Versabox (must be used with UNREMOTEMWS)	Sold Separately
WLKITMWS	Microwave Sensor on/off plug-in Versabox (must be used with UNREMOTEMWS)	Sold Separately
UNREMOTEMWS	Remote control for use with microwave sensor	Sold Separately
WL95BEW	White Eyelid Accessory (300mm only)	Sold Separately
WL95BE	Black Eyelid Accessory (300mm only)	Sold Separately



COLLINGWOOD
LIGHTING

LIGHTING INNOVATION

WL95 Versa is the ultimate bulkhead, with CCT adjustable from warm 3000K to bright 6000K and wattage options ranging from 5W to 20W, all packed in a slim, impact-resistant (IK09) and weatherproof (IP65) design. Plus with high efficiency of up to 154lm/W. This bulkhead offers easy installation with 4-way conduit entry, detachable terminal block, and tool-less modular design, and is compatible with Versabox plug-and-play kits for ultimate project customization.