



Astro



Part of the Bulkheads product category



Model	Astro CCT 2 Photocell Black
Code	AALED2/BV/CCT/PC
Application	Ancillary, Commercial, Education, Healthcare, Industrial, Outdoor

GENERAL INFORMATION

Input	220-240V
Wattage	7W - 12W
Operating Temp	-10°C - 25°C
Lumens Delivered	1000lm - 1700lm(4000K)
lm/W	140lm/W(4000K)
CCT	3000/4000/5700K
Beam Angle	115

MATERIAL INFORMATION


Product Weight without	1.133 kg
Packaging	
Colour / Finish	Black / Visiluxe

TECHNICAL INFORMATION

Class Protection	2
Light Source	LED
SDCM (Initial Macadam)	3
CRI	80
Internal / External	Internal / External
Surface / Recessed / Suspended	Ceiling, Wall
L70 @ 25°C	L70 B50 60,000h

PRODUCT FEATURES

- All polycarbonate multi-purpose LED square bulkhead suitable for ancillary areas and industrial applications
- Push fit feed-in, feed-out terminals for speed and ease of installation
- Internal CCT selector switch allows the installer to choose the CCT between 3000K and 4000K
- Supplied c/w optional trim attachment which provides a more commercially aesthetic appearance
- Unique Visiluxe diffuser allows 90% light transmission from LED source for increased performance

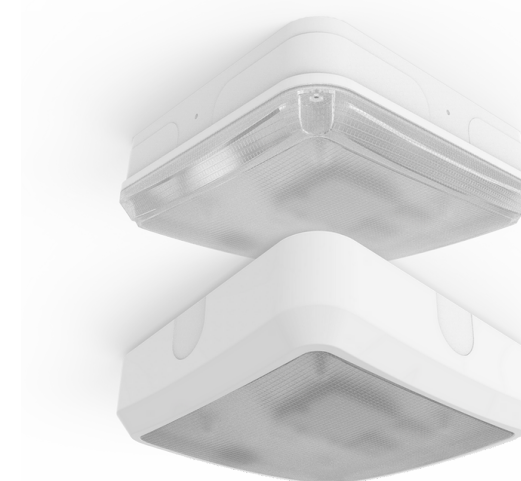



Astro



Part of the Bulkheads product category

Model	Astro CCT 2 Photocell Black
Code	AALED2/BV/CCT/PC
Application	Ancillary, Commercial, Education, Healthcare, Industrial, Outdoor

