



ARX Bulkhead

Part of the Bulkheads product category



Model	ARX Anti-Ligature Bulkhead CCT White
Code	AARXB/1
Application	Commercial, Healthcare, Hospitality, Industrial, Outdoor

GENERAL INFORMATION

Input	220-240V
Wattage	10.5W - 18W
Operating Temp	-10°C - 40°C
Lumens Delivered	1300lm - 2200lm (4000K)
lm/W	130lm/W - 120lm/W (4000K)
CCT	3000/4000K
Beam Angle	110

MATERIAL INFORMATION


Main Material	Polycarbonate
Diffuser Material	Polycarbonate
Product Weight without Packaging	1.2 kg
Colour / Finish	White
Diameter	350 mm
Height	110 mm

TECHNICAL INFORMATION

Class Protection	2
Light Source	LED
SDCM (Initial Macadam)	3
CRI	80
Internal / External	Internal / External
Surface / Recessed / Suspended	Ceiling, Wall
Power Factor	0.7
L70 @ 25°C	L70 B50 90,000h

PRODUCT FEATURES

- IP65 IK10 CCT polycarbonate luminaire suitable for healthcare and educational applications
- CCT selectable between 3000K and 4000K and power selectable; offering a choice of 2 outputs in one luminaire
- IK10 polycarbonate construction ensures maximum strength and durability
- Deep bezel design mounts flush with installation surface, not allowing access to the rear of the fitting without first removing the bezel
- Anti-tamper screws prevent vandalism or removal of bezel with standard tools

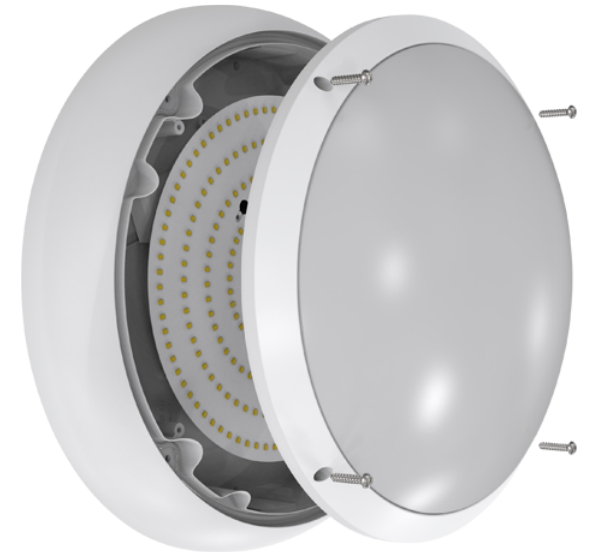



ARX Bulkhead

Part of the Bulkheads product category



Model	ARX Anti-Ligature Bulkhead CCT White
Code	AARXB/1
Application	Commercial, Healthcare, Hospitality, Industrial, Outdoor

