# ARX Bulkhead

5YR IP65 IK10

Part of the Bulkheads product category

| | |
|---|---|
| **Model** | ARX Anti-Ligature Bulkhead CCT White |
| **Code** | AARXB/1 |
| **Application** | Commercial, Healthcare, Hospitality, Industrial, Outdoor |

## GENERAL INFORMATION

| | |
|---|---|
| **Input** | 220-240V |
| **Wattage** | 10.5W - 18W |
| **Operating Temp** | -10°C - 40°C |
| **Lumens Delivered** | 1300lm - 2200lm (4000K) |
| **lm/W** | 130lm/W - 120lm/W (4000K) |
| **CCT** | 3000/4000K |
| **Beam Angle** | 110 |

## MATERIAL INFORMATION

| | |
|---|---|
| **Main Material** | Polycarbonate |
| **Diffuser Material** | Polycarbonate |
| **Product Weight without Packaging** | 1.2 kg |
| **Colour / Finish** | White |
| **Diameter** | 350 mm |
| **Height** | 110 mm |

## TECHNICAL INFORMATION

| | |
|---|---|
| **Class Protection** | 2 |
| **Light Source** | LED |
| **SDCM (Initial Macadam)** | 3 |
| **CRI** | 80 |
| **Internal / External** | Internal / External |
| **Surface / Recessed / Suspended** | Ceiling, Wall |
| **Power Factor** | 0.7 |
| **L70 @ 25°C** | L70 B50 90,000h |

## PRODUCT FEATURES

- IP65 IK10 CCT polycarbonate luminaire suitable for healthcare and educational applications
- CCT selectable between 3000K and 4000K and power selectable; offering a choice of 2 outputs in one luminaire
- IK10 polycarbonate construction ensures maximum strength and durability
- Deep bezel design mounts flush with installation surface, not allowing access to the rear of the fitting without first removing the bezel
- Anti-tamper screws prevent vandalism or removal of bezel with standard tools



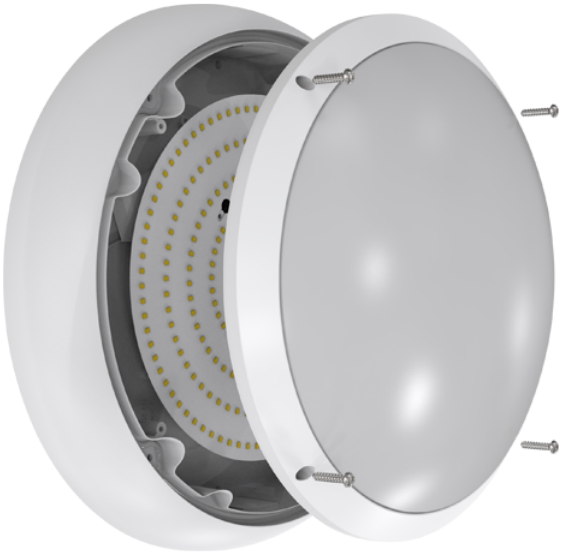

# ARX Bulkhead

5YR IP65 IK10

Part of the Bulkheads product category

| | |
|---|---|
| **Model** | ARX Anti-Ligature Bulkhead CCT White |
| **Code** | AARXB/1 |
| **Application** | Commercial, Healthcare, Hospitality, Industrial, Outdoor |

