



ARX Linear



Part of the Commercial Linear product category

Model ARX Anti-Ligature Surface Linear CCT 1500mm White
Code AARXL5/1/W
Application Commercial, Healthcare, Hospitality, Industrial

GENERAL INFORMATION

Input	220-240V
Wattage	14/28/43/57W
Operating Temp	-20°C - 40°C
Lumens Delivered	1800-7300lm (4000K)
lm/W	130lm/W (4000K)
CCT	4000/5000/6500K
Beam Angle	100

MATERIAL INFORMATION


Main Material	Steel
Diffuser Material	Polycarbonate
Product Weight without Packaging	12.5 kg
Colour / Finish	White
Height	82 mm

TECHNICAL INFORMATION

Class Protection	1
Light Source	LED
SDCM (Initial Macadam)	3
CRI	80
Internal / External	Internal / External
Surface / Recessed / Suspended	Ceiling
Power Factor	0.9
L70 @ 25°C	L70 B50 90,000h

PRODUCT FEATURES

- Ultra robust anti-ligature surface linear fitting suitable for healthcare, education and external subway/walkway applications
- IK10 and IP65 ratings ensure anti-vandal resistance and suitability for anti-ligature applications
- Intelligently designed 2 part construction means fewer screws when removing and re-attaching front frame, ensuring a quick and easy installation
- CCT selectable between 4000K, 5000K and 6000K and power selectable; offering a choice of 6 outputs in one luminaire

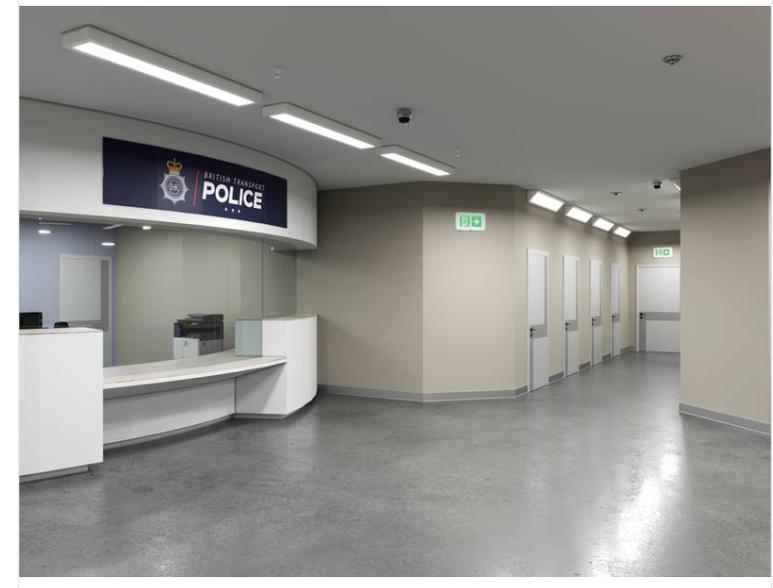



ARX Linear



Part of the Commercial Linear product category

Model ARX Anti-Ligature Surface Linear CCT 1500mm White
Code AARXL5/1/W
Application Commercial, Healthcare, Hospitality, Industrial

