



Avio

Avio Bollard Black Self-Test Emergency

Code: AAVIO/1/BK/SM3



PRODUCT FEATURES

- Robust die-cast aluminium bollard with a choice of textured finishes suitable for commercial applications
- Half-shield lens option to offer single direction output
- Removable head design allows easy access to the integrated CCT and wattage switches, seamlessly housed within the head for quick adjustments and enhanced convenience during installation or maintenance
- Supplied c/w base plate, roof mounting kit accessory available
- CCT selectable between 3000K and 4000K and power selectable; offering a choice of 4 outputs, in one luminaire
- Precision-engineered lensed optic delivers exceptional light distribution and performance, ensuring maximum efficiency and visual comfort
- Comes complete with a AFIX connector (AFIXIP/1/SC/3C) for quick and easy IP rated connection

GENERAL INFORMATION	
Wattage	6W - 24W
Lumens Delivered	570lm - 2200lm (4000K)
Lm/W	95lm/W (4000K)
Beam Angle	140
CRI	80
CCT	3000K/4000K
Input	220-240V
Operating Temp	-30°C - 50°C
SDCM	5
Product Weight without Packaging	5.13 kg

TECHNICAL INFORMATION	
Light Source	LED
Colour / Finish	Black
IP Rating	IP66
IK Rating	IK08
Class Protection	1
Internal / External	External
Surface / Recessed / Suspended	Floor
Lumen Depreciation	L80 60,000h
Warranty (Years)	5
CE Mark	Yes
Diameter	170 mm
Height	930 mm





Category	Bollards
Application	Commercial, Education, Healthcare, Hospitality, Industrial, Retail
Specification	Architectural

Avio

Avio Bollard Black Self-Test Emergency

Code: AAVIO/1/BK/SM3

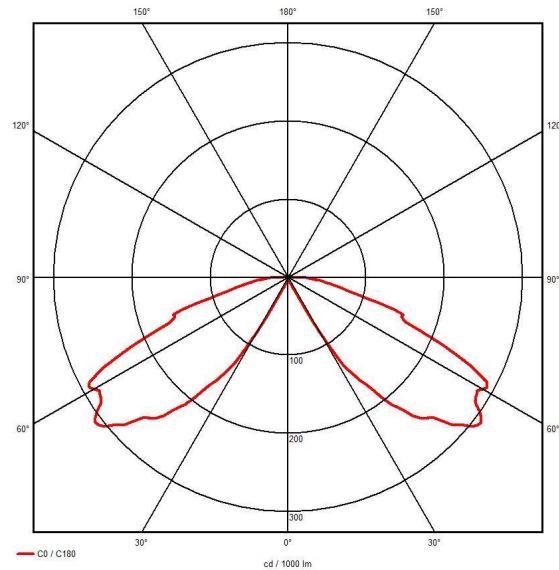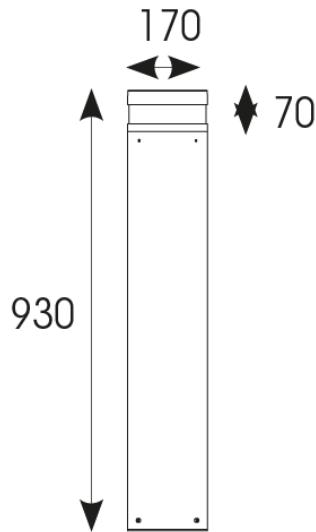

ACCESSORIES

AAVIO/HS/BK

Avio Bollard Half Shield Black

ARMKIT/1

Bollard Root Mounting Kit