



Beacon



Part of the Emergency product category

Model	Beacon Non-Maintained Emergency Downlight Black
Code	ABEA/1/B
Application	Ancillary, Commercial, Education, Hospitality, Retail


GENERAL INFORMATION	
Input	220-240V
Wattage	2.5W
Operating Temp	0°C-45°C
Lumens Delivered	250lm
CCT	5000K
Beam Angle	Open area - 140° Escape route - 160°x40°

MATERIAL INFORMATION	
Main Material	Polycarbonate
Diffuser Material	PMMA
Product Weight without Packaging	0.28 kg
Colour / Finish	Black
Diameter	80 mm
Height	30 mm

TECHNICAL INFORMATION	
Class Protection	2
Light Source	LED
SDCM (Initial Macadam)	6
CRI	70
Internal / External	Internal
Surface / Recessed / Suspended	Recessed

PRODUCT FEATURES	
- LED Non-Maintained adjustable polycarbonate downlight - LiFePO4 Lithium battery provides enhanced product lifetime - Supplied with open area and escape route interchangeable lenses - Available both in Self-Test and DALI emergency variant - Available in black and white finishes	

ACCESSORIES	
ASBP/47	3.2V 3200mAh LiFePO4 Battery - ABEA/1, ASIP/1/HO

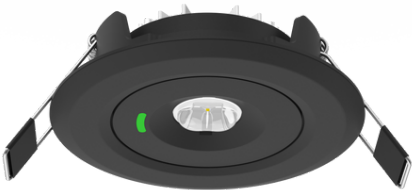



Beacon



Part of the Emergency product category

Model	Beacon Non-Maintained Emergency Downlight Black
Code	ABEA/1/B
Application	Ancillary, Commercial, Education, Hospitality, Retail

