



# Beacon



Part of the Emergency product category

<b>Model</b>	Beacon Non-Maintained Emergency Downlight White
<b>Code</b>	ABEA/1/W
<b>Application</b>	Ancillary, Commercial, Education, Hospitality, Retail

## GENERAL INFORMATION

<b>Input</b>	220-240V
<b>Wattage</b>	2.5W
<b>Operating Temp</b>	0°C-45°C
<b>Lumens Delivered</b>	250lm
<b>CCT</b>	5000K
<b>Beam Angle</b>	Open area - 140° Escape route - 160°x40°

## MATERIAL INFORMATION

<b>Main Material</b>	Polycarbonate
<b>Diffuser Material</b>	PMMA
<b>Product Weight without Packaging</b>	0.28 kg
<b>Colour / Finish</b>	White
<b>Diameter</b>	80 mm
<b>Height</b>	30 mm

## TECHNICAL INFORMATION



<b>Class Protection</b>	2
<b>Light Source</b>	LED
<b>SDCM (Initial Macadam)</b>	6
<b>CRI</b>	70
<b>Internal / External</b>	Internal
<b>Surface / Recessed / Suspended</b>	Recessed

## PRODUCT FEATURES

- LED Non-Maintained adjustable polycarbonate downlight
- LiFePO4 Lithium battery provides enhanced product lifetime
- Supplied with open area and escape route interchangeable lenses
- Available both in Self-Test and DALI emergency variant
- Available in black and white finishes

## ACCESSORIES

ASBP/47	3.2V 3200mAh LiFePO4 Battery - ABEA/1, ASIP/1/HO
---------	--

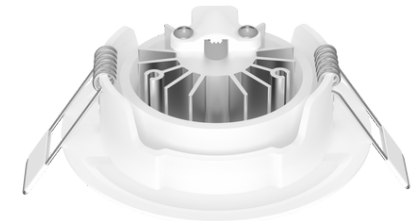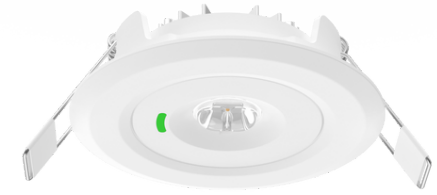



# Beacon



Part of the Emergency product category

- Model** Beacon Non-Maintained Emergency Downlight White
- Code** ABEA/1/W
- Application** Ancillary, Commercial, Education, Hospitality, Retail

